
Ola 500

LL1440103


Lombardo.





Technical information:

Installation:	Wall, Ceiling, Surface mounting wall, Surface mounting ceiling
Finish:	White RAL 9010
Diffuser type:	PMMA
Lamp type:	LED
Energy performance class:	F
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	42
Lumen:	5500
Real Lumen:	2139
Power supply:	integrated
LED:	AC DIRECT
Insulation class:	CL.II
Type of protection:	**IP 66**
Resistance to breakage:	**IK 08 5J xx7**
Standards and Marks of Conformity:	CE UK CA
Dimming	Phase cut




Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Ola 500

LL1440103

Lombardo.

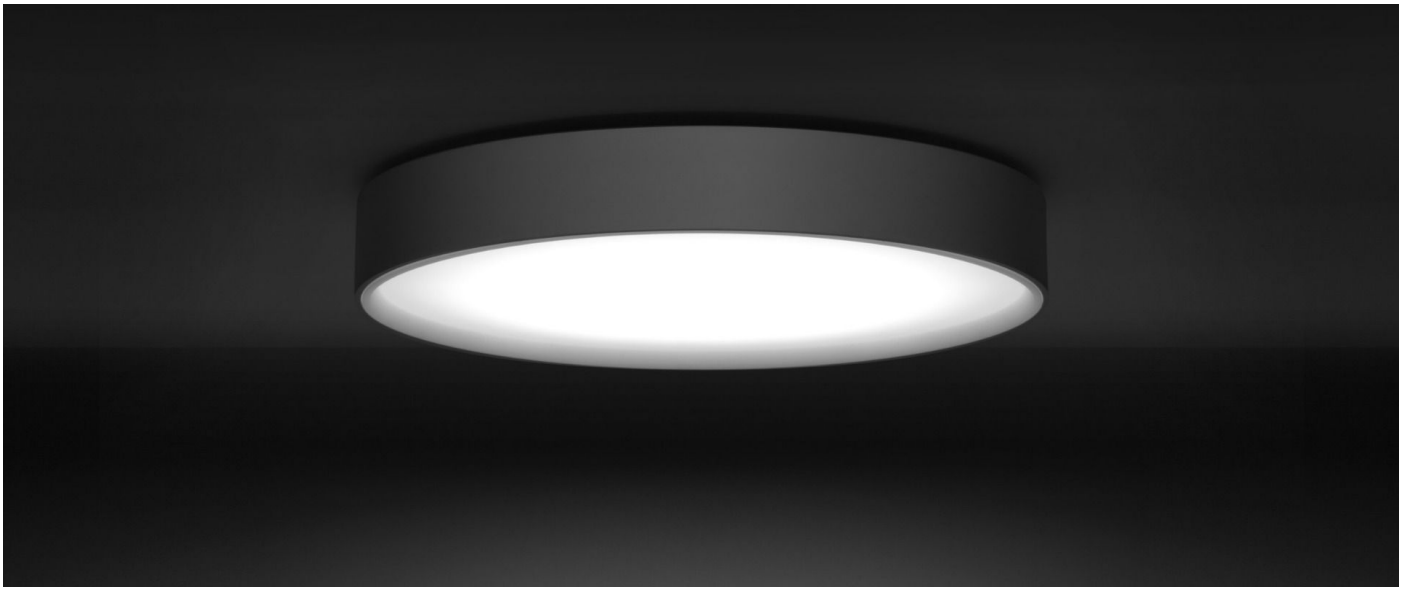




Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Ola 500


LL1440103

Lighting simulation:

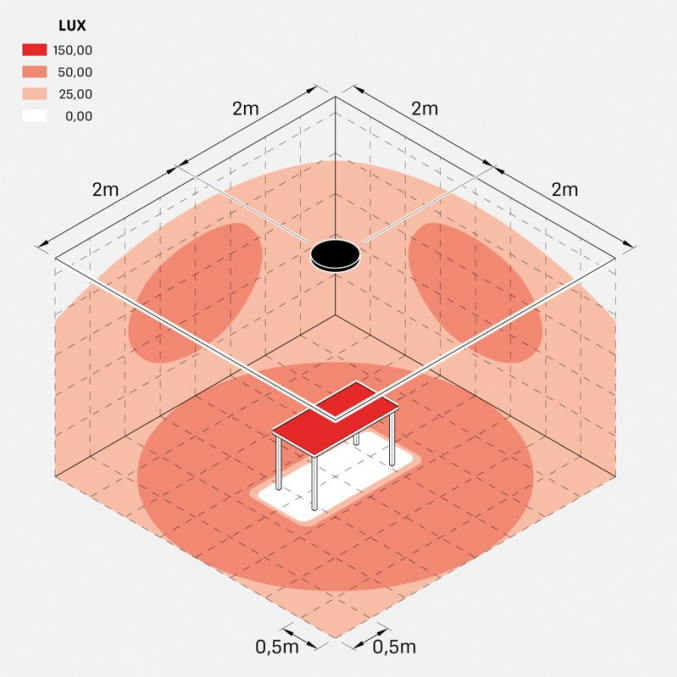

ola_500

Photometric curves:

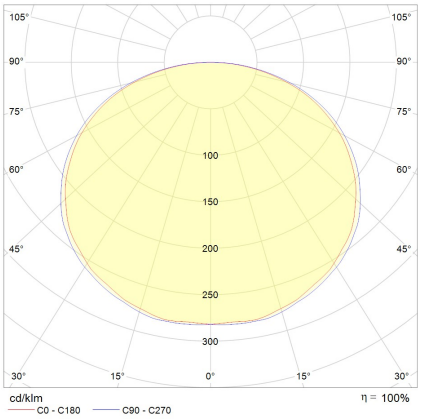

Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it