

# Pik 160 H 500

LL1351072

**Lombardo.**




## Technical information:

Installation:	Ground
Material:	Aluminium
Finish:	Brown Anodized Aluminium
Treatment:	Anodization
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	F
Colour temperature:	2700K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	9
Lumen:	1035
Real Lumen:	780
Power supply:	✓ integrated
LED:	AC DIRECT
Insulation class:	⊕ CL.I
Type of protection:	<b>IP 65</b>
Resistance to breakage:	<b>IK 08 5J xx7</b>
Standards and Marks of Conformity:	CE UK CA

Sand RAL 1013 finish: painted aluminium, sea treatment against salt spray is not included (Bordo Mare).

*All parts in direct contact with the soil must never be covered by the soil itself or come into contact with aggressive chemicals (e.g. fertilisers, herbicides, pool and/or floor cleaning products, etc.). Clean parts covered with soil build-up or cement dust periodically. Outdoor products must be installed with the appropriate plastic accessories. They must not be installed directly on the ground or directly on concrete because contact between the two materials can create accelerated oxidation of the device.*



# Pik 160 H 500

LL1351072

**Lombardo.**



## Installation images:




**Lombardo S.r.l.**

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E [info@lombardo.it](mailto:info@lombardo.it)

**lombardo.it**

## Lighting simulation:

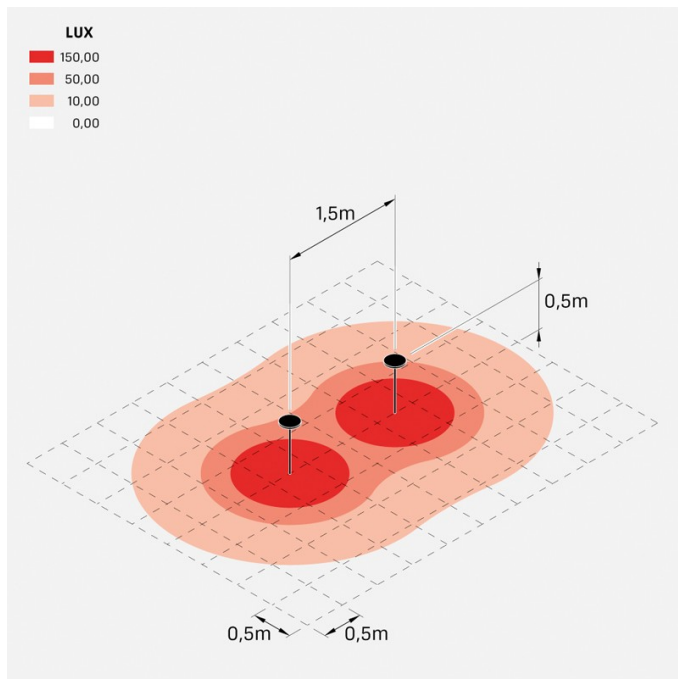

pik\_160\_h500