

Pik 160 H 500

LT1351043

Lombardo.




Technical information:

Installation:	Ground
Material:	Aluminium
Finish:	Grey Anodized Aluminium
Treatment:	Anodization
Diffuser type:	Polycarbonate
Lamp type:	LED
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	9
Lumen:	1035
Real Lumen:	780
Power supply:	⊗ not included
LED:	24V
Insulation class:	⚡ CL.III
Type of protection:	IP 65
Resistance to breakage:	IK 08 5J xx7
Standards and Marks of Conformity:	CE UK CA

Sand RAL 1013 finish: painted aluminium, sea treatment against salt spray is not included (Bordo Mare).

All parts in direct contact with the soil must never be covered by the soil itself or come into contact with aggressive chemicals (e.g. fertilisers, herbicides, pool and/or floor cleaning products, etc.). Clean parts covered with soil build-up or cement dust periodically. Outdoor products must be installed with the appropriate plastic accessories. They must not be installed directly on the ground or directly on concrete because contact between the two materials can create accelerated oxidation of the device.



Pik 160 H 500

LT1351043

Lombardo.



Installation images:




Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it

Lighting simulation:

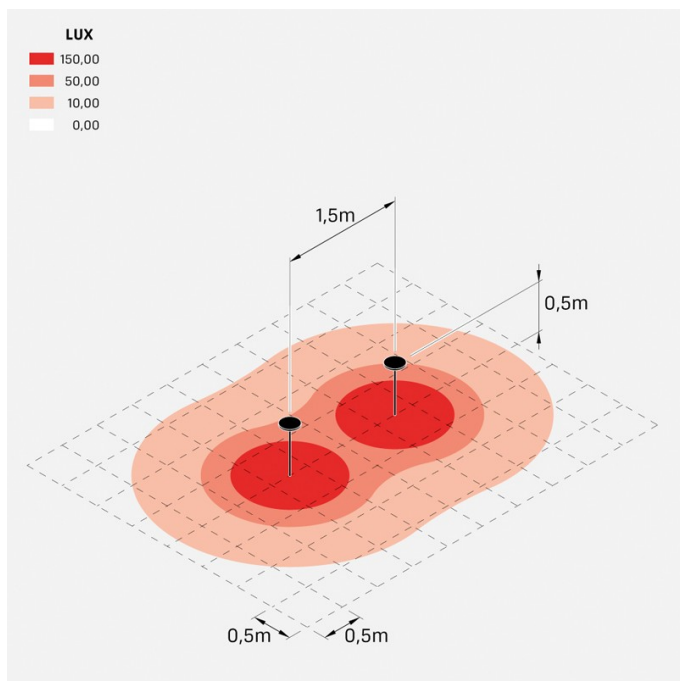

pik_160_h500

Photometric curves:

