




Pik 160 H 500

DIFF. POLIGLASS

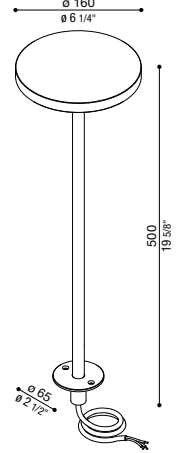


IP 65 IK 08 5J xx7 CE UK CA

| LED | W | LM | REAL LM | COL. | CODE * | * LED COLOUR |
|-----|------|-----|-----------|----------|---|--------------|
| 9 | 1035 | 780 | AC DIRECT | LL135104 | N 4000K 3 3000K, Im -5% 2 2700K, Im -5% | |
| | | | | LL135105 | | |
| | | | | LL135106 | | |
| | | | | LL135107 | | |
| 9 | 1035 | 780 | 24V | LT135104 | N 4000K 3 3000K, Im -5% 2 2700K, Im -5% | |
| | | | | LT135105 | | |
| | | | | LT135106 | | |
| | | | | LT135107 | | |

Pik 80 Wall

DIFF. POLIGLASS



IP 65 IK 08 5J xx7 CE UK CA

| LED | W | LM | REAL LM | COL. | CODE * | * LED COLOUR |
|-----|-----|-----|-----------|----------|---|--------------|
| 4,5 | 520 | 245 | AC DIRECT | LL135016 | N 4000K 3 3000K, Im -5% 2 2700K, Im -5% | |
| | | | | LL135017 | | |
| | | | | LL135018 | | |
| | | | | LL135019 | | |


Fornito con rosone per il fissaggio.
Compreso di connettori gel rapidi IP68 per il cablaggio.

Supplied with mounting base.
Including quick gel connectors IP68 for wiring.

Livré avec support de fixation.
Compris des connecteurs gel rapides IP 68 pour le câblage.

Pik 160 Wall

DIFF. POLIGLASS



IP 65 IK 08 5J xx7 CE UK CA

| LED | W | LM | REAL LM | COL. | CODE * | * LED COLOUR |
|-----|------|-----|-----------|----------|---|--------------|
| 9 | 1035 | 780 | AC DIRECT | LL135116 | N 4000K 3 3000K, Im -5% 2 2700K, Im -5% | |
| | | | | LL135117 | | |
| | | | | LL135118 | | |
| | | | | LL135119 | | |

Fornito con rosone per il fissaggio.
Compreso di connettori gel rapidi IP 68 per il cablaggio.

Supplied with mounting base.
Including quick gel connectors IP 68 for wiring.

Livré avec support de fixation.
Compris des connecteurs gel rapides IP68 pour le câblage.

Finishing

| | |
|--|--|
| Alluminio Anodizzato Grigio Grey Anodized Aluminium Aluminium anodisé Gris | Alluminio Anodizzato Verde Green Anodized Aluminium Aluminium anodisé Vert |
| Alluminio Anodizzato Nero Black Anodized Aluminium Aluminium anodisé Noir | Alluminio Anodizzato Marrone Brown Anodized Aluminium Aluminium anodisé Marron |

*** Led colour**

- N 4000K
- 3 3000K, Im -5%
- 2 2700K, Im -5%

Completa il codice
sostituendo al quadrato rosso la lettera o il numero corrispondente alla temperatura colore scelta.

Complete the code
by replacing the red box with the letter or number corresponding to the selected colour temperature.

Compléter le code
en remplaçant le carré rouge par la lettre ou le numéro correspondant à la sélection de température couleur.

- Alimentatore integrato**
Integrated driver
Alimentation intégrée
- Alimentatore escluso**
Driver not included
Alimentation non incluse