


Pin T Asimmetrico

LL1250043

Lombardo.



Technical information:

Installation:	Wall recess
Material:	Aluminium
Treatment:	Sea Treatment
Diffuser type:	Serigraphed glass
Lamp type:	LED
Energy performance class:	F
Colour temperature:	3000K
CRI:	>80
LB Factor:	L70B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	2
Lumen:	200
Real Lumen:	67
Power supply:	✓ integrated
LED:	AC DIRECT
Insulation class:	Ⓜ CL.I
Power cable:	0.20 metri H05RN-F
Type of protection:	IP 66
Resistance to breakage:	IK 07 2J xx5
Standards and Marks of Conformity:	CE UK CA
Dimming	Phase cut


Deflector made of aluminum. Codes LL12510: Kit consisting of Pin T Asimmetrico+ recess box 502 LB1250001.



Pin T Asimmetrico

LL1250043

Lombardo.

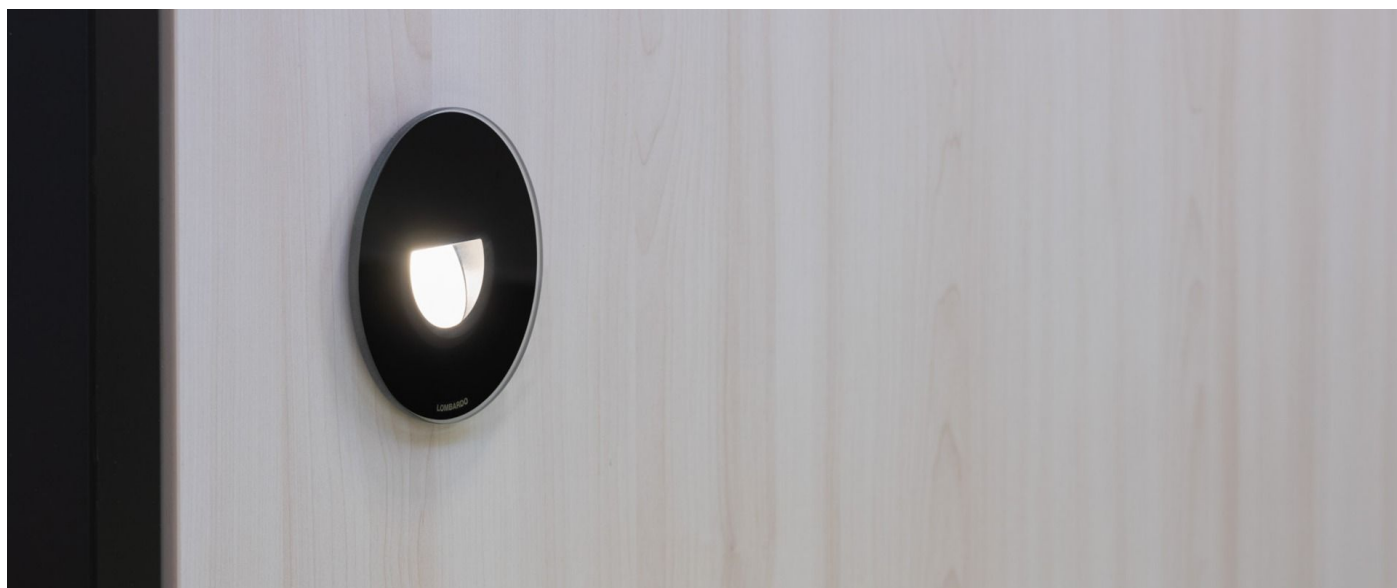

Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it


lombardo.it

Pin T Asimmetrico

Lombardo.


LL1250043

Lighting simulation:

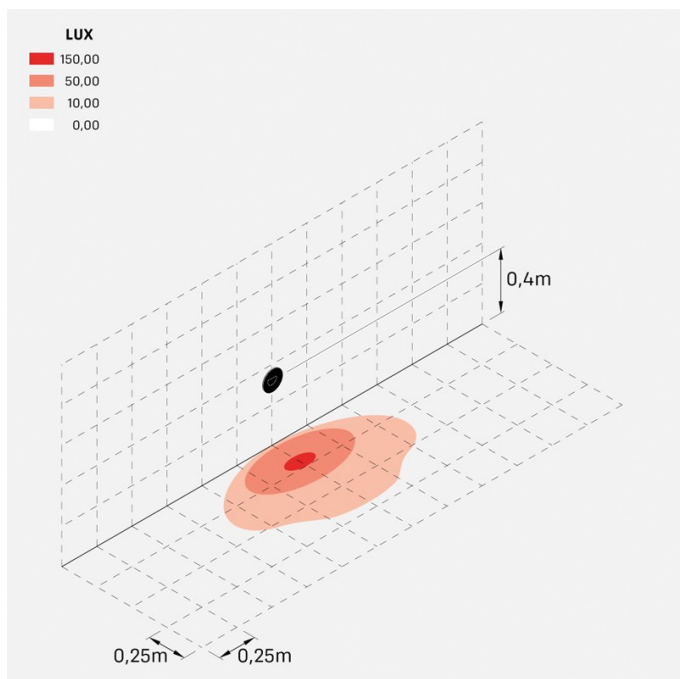

pin_t_asimm

Photometric curves:

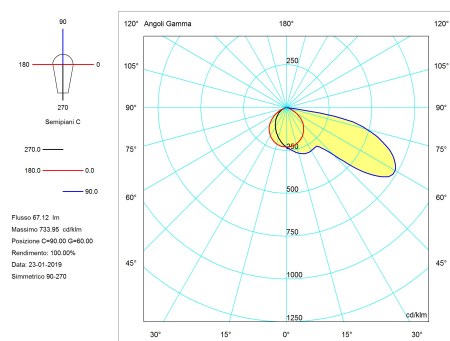

Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

lombardo.it