

# Pin T Asimmetrico

LL1251052

**Lombardo.**



## Technical information:

|                                    |                                                                                           |
|------------------------------------|-------------------------------------------------------------------------------------------|
| Installation:                      | Wall recess                                                                               |
| Material:                          | Aluminium                                                                                 |
| Finish:                            | Black serigraphy                                                                          |
| Treatment:                         | Sea Treatment                                                                             |
| Diffuser type:                     | Serigraphed glass                                                                         |
| Lamp type:                         | LED                                                                                       |
| Energy performance class:          | F                                                                                         |
| Colour temperature:                | 2700K                                                                                     |
| CRI:                               | >80                                                                                       |
| LB Factor:                         | L70B20 - 50.000h                                                                          |
| Photobiological risk:              | RG1                                                                                       |
| Power consumption (Watt):          | 2                                                                                         |
| Lumen:                             | 200                                                                                       |
| Real Lumen:                        | 67                                                                                        |
| Power supply:                      | ✓ integrated                                                                              |
| LED:                               | AC DIRECT                                                                                 |
| Version with:                      |  Kit |
| Insulation class:                  | ⊕ CL.I                                                                                    |
| Power cable:                       | 0.20 metri H05RN-F                                                                        |
| Type of protection:                | <b>IP 66</b>                                                                              |
| Resistance to breakage:            | <b>IK 07 2J xx5</b>                                                                       |
| Standards and Marks of Conformity: | <b>CE UK CA</b>                                                                           |

Deflector made of aluminum. Codes LL12510: Kit consisting of Pin T Asimmetrico+ recess box 502 LB1250001.



# Pin T Asimmetrico

LL1251052

**Lombardo.**




# Pin T Asimmetrico

LL1251052

**Lombardo.**

## Lighting simulation:

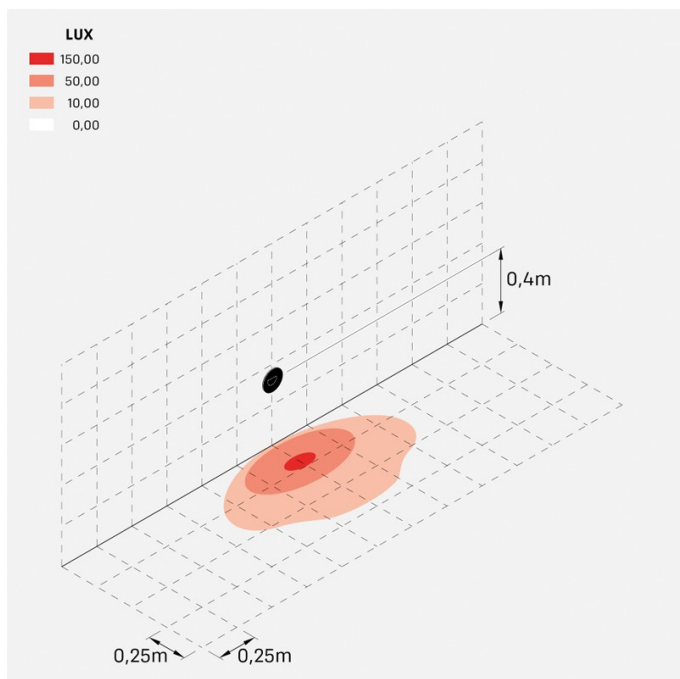

pin\_t\_asimm