

# Pin T Asimmetrico

LL1251062

**Lombardo.**



## Technical information:

Installation:	Wall recess
Material:	Aluminium
Finish:	Grey High Tech Serigraphy
Treatment:	Sea Treatment
Diffuser type:	Serigraphed glass
Lamp type:	LED
Energy performance class:	F
Colour temperature:	2700K
CRI:	>80
LB Factor:	L70B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	2
Lumen:	200
Real Lumen:	67
Power supply:	☑ integrated
LED:	AC DIRECT
Version with:	 Kit
Insulation class:	⊖ CL.I
Power cable:	0.20 metri H05RN-F
Type of protection:	<b>IP 66</b>
Resistance to breakage:	<b>IK 07 2J xx5</b>
Standards and Marks of Conformity:	<b>CE UK EA</b>

Deflector made of aluminum. Codes LL12510: Kit consisting of Pin T Asimmetrico+ recess box 502 LB1250001.



# Pin T Asimmetrico

LL1251062

**Lombardo.**




# Pin T Asimmetrico

Lombardo.

LL1251062

## Lighting simulation:

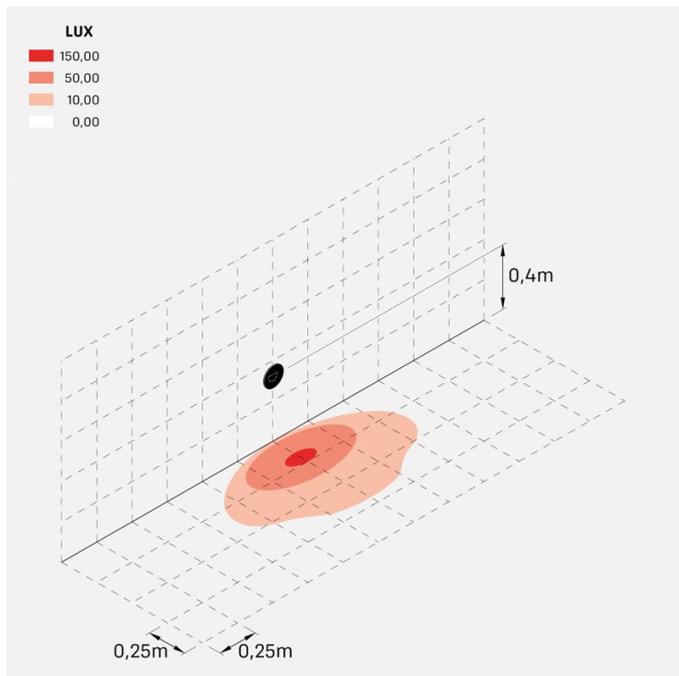

pin\_t\_asimm