
Ross 280

LL1240053


Lombardo.





Technical information:

Installation:	Wall, Ceiling, Surface mounting wall, Surface mounting ceiling
Finish:	White from moulding
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	F
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	13
Lumen:	1560
Real Lumen:	895
Power supply:	integrated
LED:	220-240 V
Circuit breaker B10 - C10 - B16 - C16	40-50-59-74
Version with:	Motion sensor included
	Day Night sensor
Insulation class:	CL.II
Type of protection:	**IP 66**
Resistance to breakage:	**IK 10 20J xx9**
Standards and Marks of Conformity:	CE UK CA




Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Ross 280

LL1240053

Lombardo.



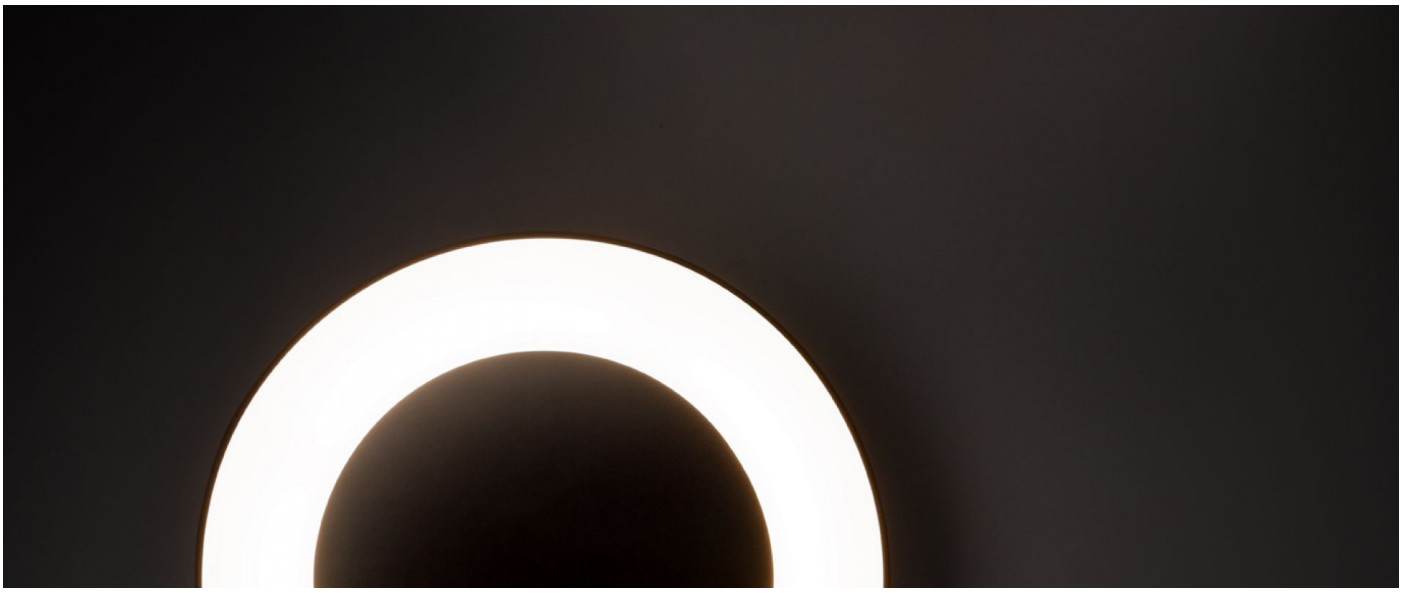


Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Ross 280


LL1240053

Lombardo.


Lighting simulation:

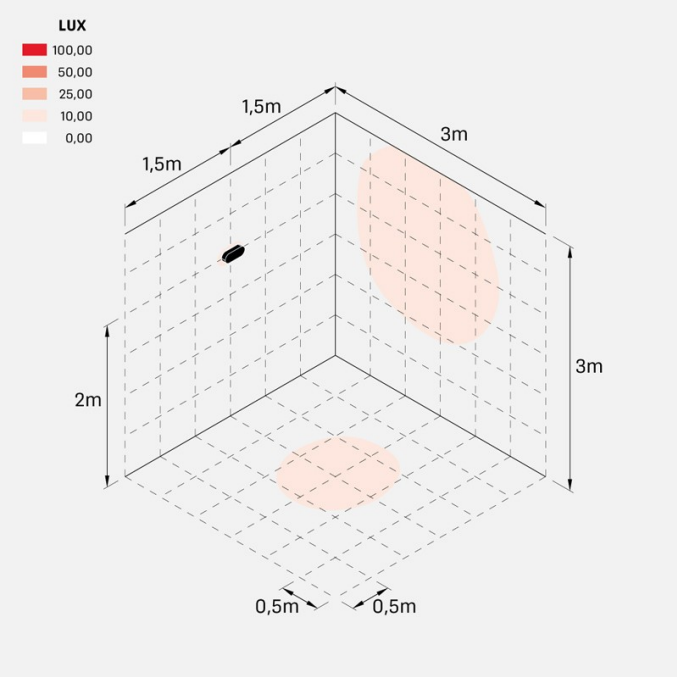


ross_280_9W_parete

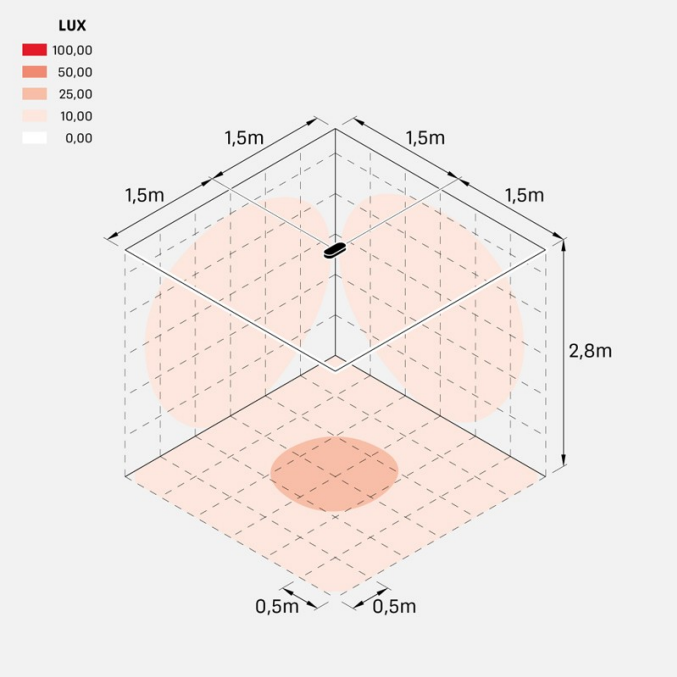

ross_280_9W_soffitto.jpg

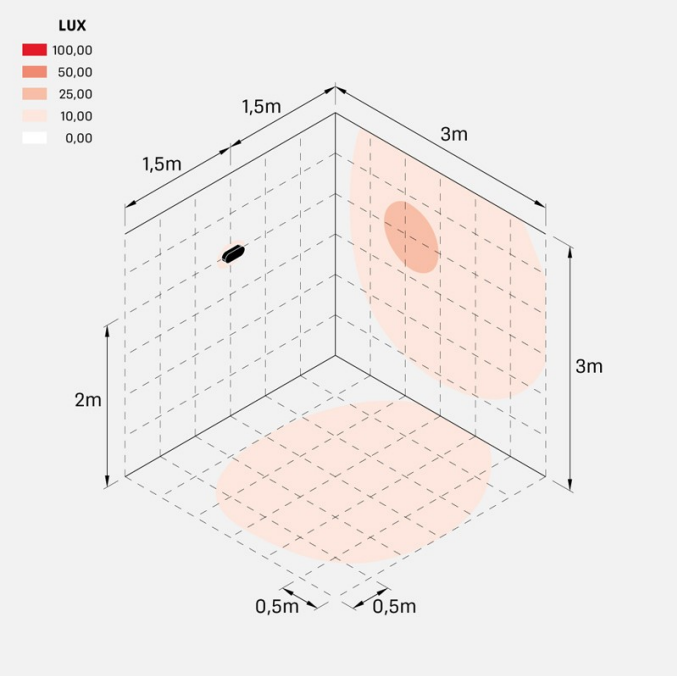

ross_280_13W_parete.jpg

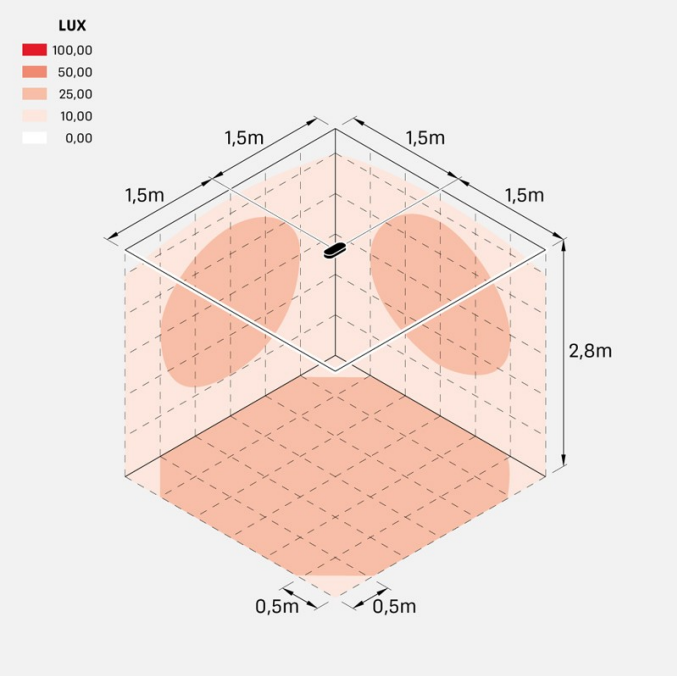

ross_280_13W_soffitto.jpg


Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Ross 280

LL1240053

Lombardo.

Photometric curves:

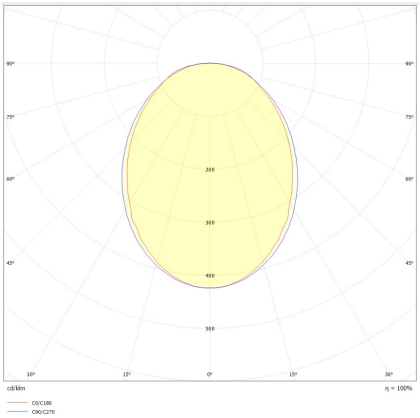

Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it