


Ross 280


LL1240253

Lombardo.



Technical information:


Installation:	Wall, Ceiling, Surface mounting wall, Surface mounting ceiling
Finish:	White from moulding
Diffuser type:	Polycarbonate
Lamp type:	LED
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	9
Lumen:	1080
Real Lumen:	583
Power supply:	✓ integrated
LED:	220-240 V
Circuit breaker	64-80-90-100
Version with:	 Maintained emergency 3h
Insulation class:	 CL.II
Type of protection:	IP 66
Resistance to breakage:	IK 10 20J xx9
Standards and Marks of Conformity:	 




Ross 280

LL1240253

Lombardo.

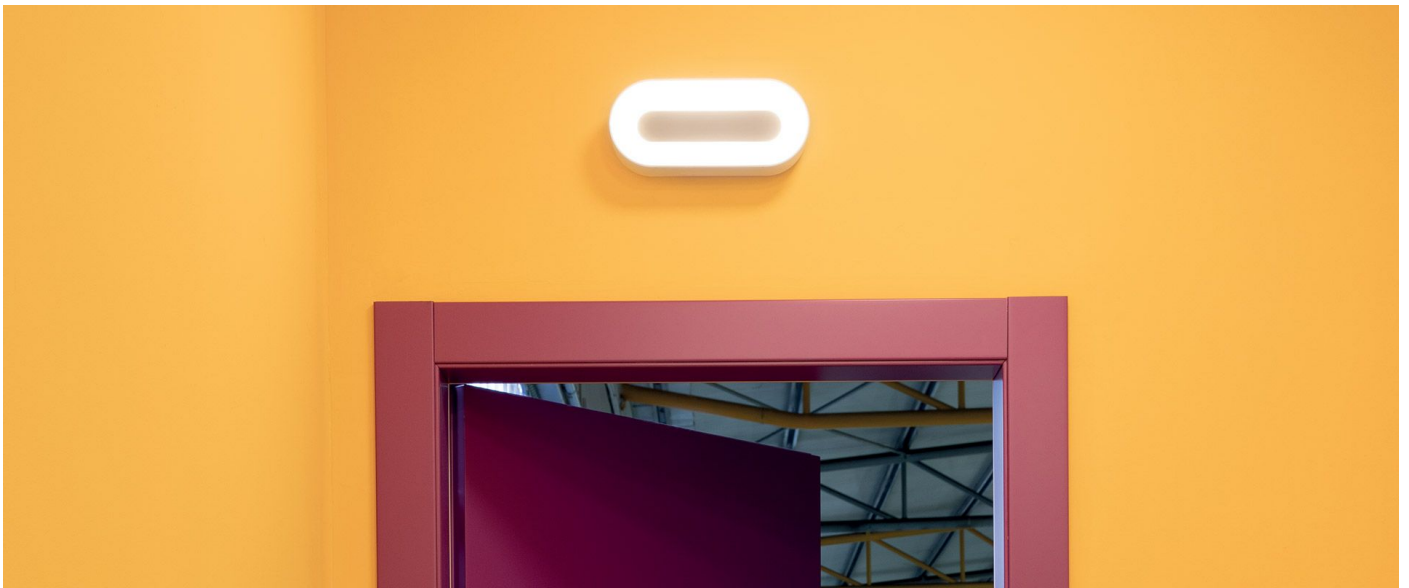

Lighting simulation:

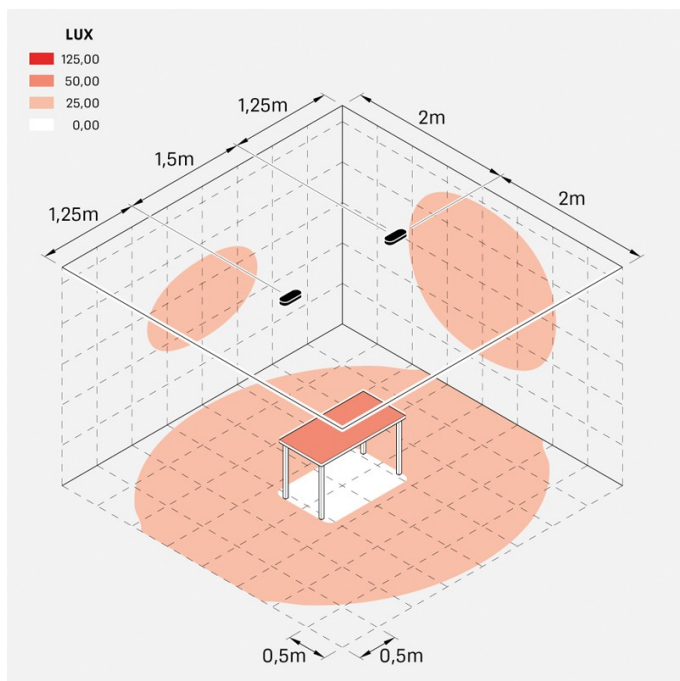

ross_280_emergenza

Photometric curves:

