


Ross 280


LL1240303

Lombardo.



Technical information:

Installation:	Wall, Ceiling, Surface mounting wall, Surface mounting ceiling
Finish:	White from moulding
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	F
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	13
Lumen:	1560
Real Lumen:	895
Power supply:	☑ integrated
LED:	220-240 V
Circuit breaker	40-50-59-74
B10 - C10 - B16 - C16	
Version with:	☼ ☾ Day Night sensor
Insulation class:	☐ CL.II
Type of protection:	IP 66
Resistance to breakage:	IK 10 20J xx9
Standards and Marks of Conformity:	CE UK EA



Lombardo S.r.l.


Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it

Ross 280

LL1240303

Lombardo.

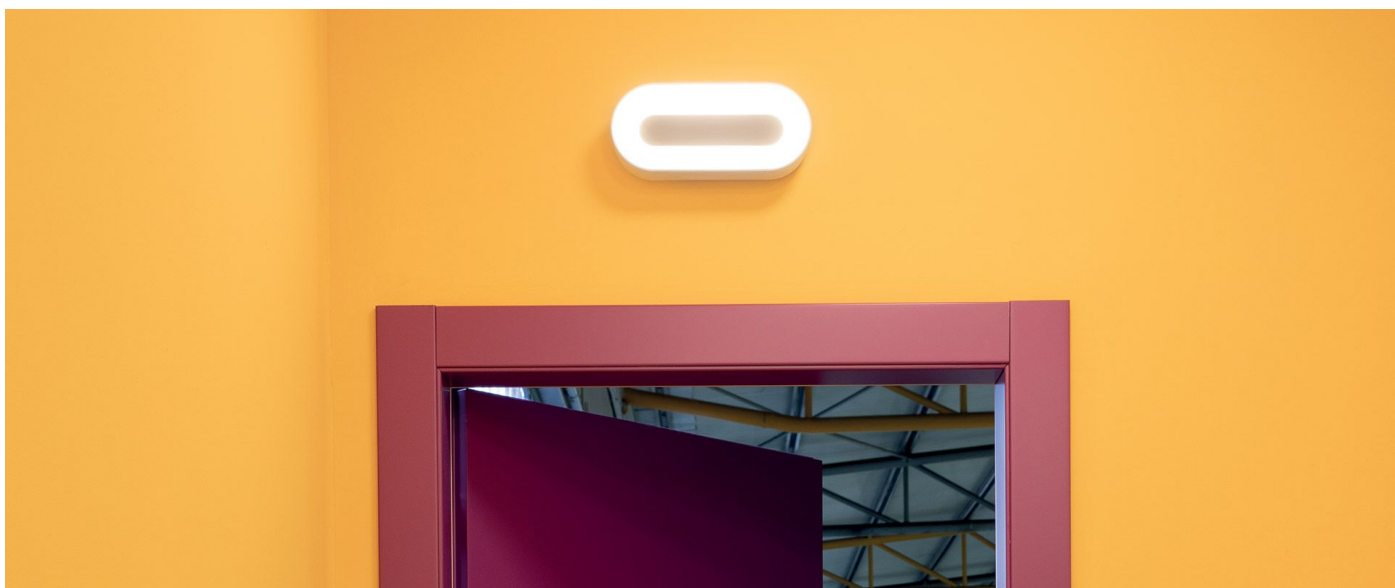

Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it


lombardo.it

Ross 280

LL1240303


Lombardo.

Lighting simulation:

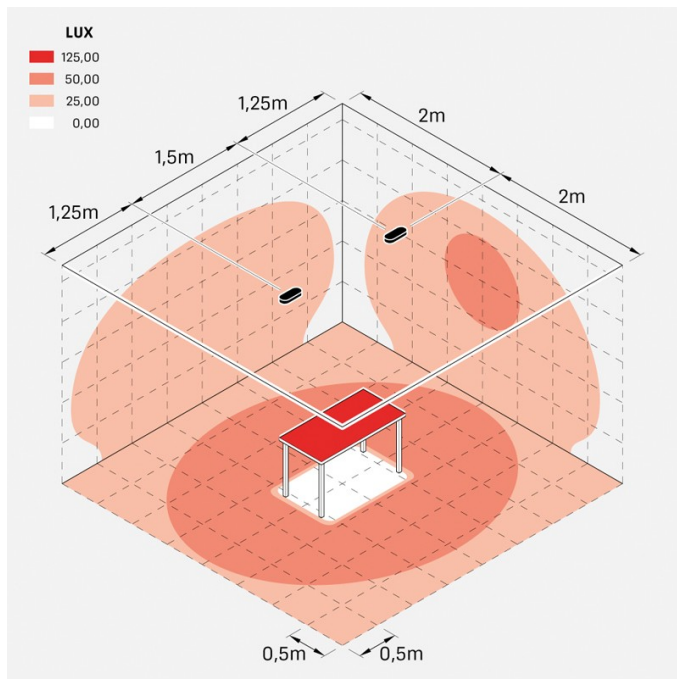

ross_280

Photometric curves:

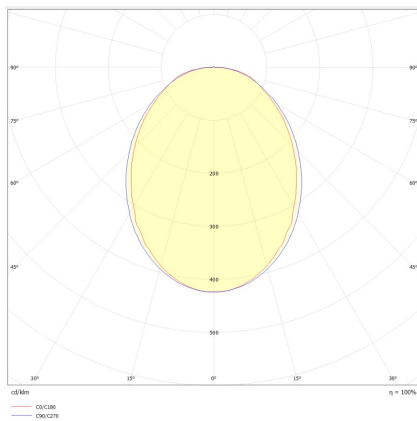

Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it