



## Technical information:


|                                    |                                                                                                                                                                             |
|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Installation:                      | Wall, Surface mounting wall                                                                                                                                                 |
| Finish:                            | White from moulding                                                                                                                                                         |
| Diffuser type:                     | Polycarbonate                                                                                                                                                               |
| Lamp type:                         | LED                                                                                                                                                                         |
| Energy performance class:          | D                                                                                                                                                                           |
| Colour temperature:                | 4000K                                                                                                                                                                       |
| CRI:                               | >80                                                                                                                                                                         |
| LB Factor:                         | L80B20 - 50.000h                                                                                                                                                            |
| Photobiological risk:              | RG1                                                                                                                                                                         |
| Power consumption (Watt):          | 25                                                                                                                                                                          |
| Lumen:                             | 3000                                                                                                                                                                        |
| Power supply:                      | ✓ integrated                                                                                                                                                                |
| LED:                               | 220-240 V                                                                                                                                                                   |
| Circuit breaker                    | 22-27-32-41                                                                                                                                                                 |
| B10 - C10 - B16 - C16              |                                                                                                                                                                             |
| Version with:                      |  Maintained emergency 3h                                                               |
| Insulation class:                  | □ CL.II                                                                                                                                                                     |
| Type of protection:                | <b>IP 66</b>                                                                                                                                                                |
| Resistance to breakage:            | <b>IK 10 20J xx9</b>                                                                                                                                                        |
| Standards and Marks of Conformity: |   |

Version supplied with sticker kit with emergency signs.



LL124073N

## Lighting simulation:

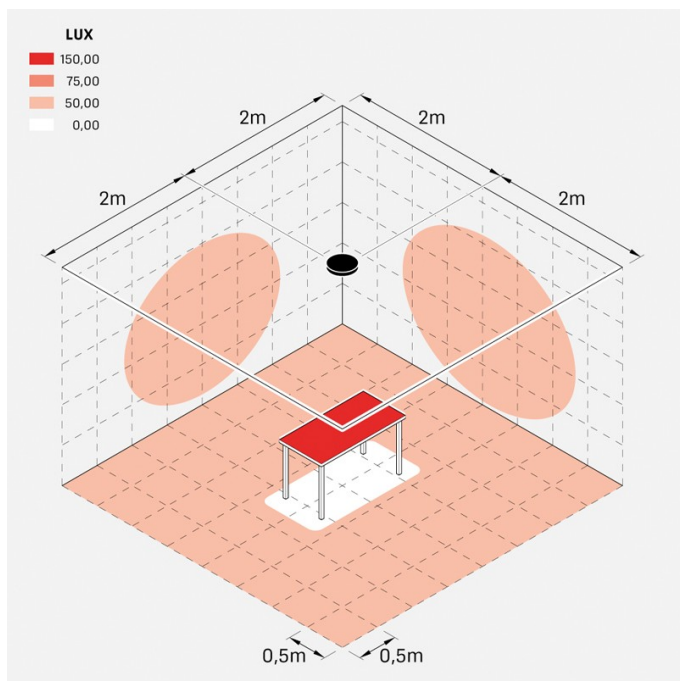

ross\_330

## Photometric curves:

