


Ross 330


LL1240163

Lombardo.



Technical information:

Installation:	Wall, Ceiling, Surface mounting wall, Surface mounting ceiling
Finish:	Black from moulding
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	D
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	25
Lumen:	3000
Real Lumen:	1842
Power supply:	☑ integrated
LED:	220-240 V
Circuit breaker	22-27-32-41
B10 - C10 - B16 - C16	
Version with:	👁 Motion sensor included
	🌙 Day Night sensor
Insulation class:	☐ CL.II
Type of protection:	IP 66
Resistance to breakage:	IK 10 20J xx9
Standards and Marks of Conformity:	CE UK ENEC



Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it

Ross 330

LL1240163

Lombardo.



Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it


lombardo.it

Ross 330

LL1240163


Lombardo.

Lighting simulation:

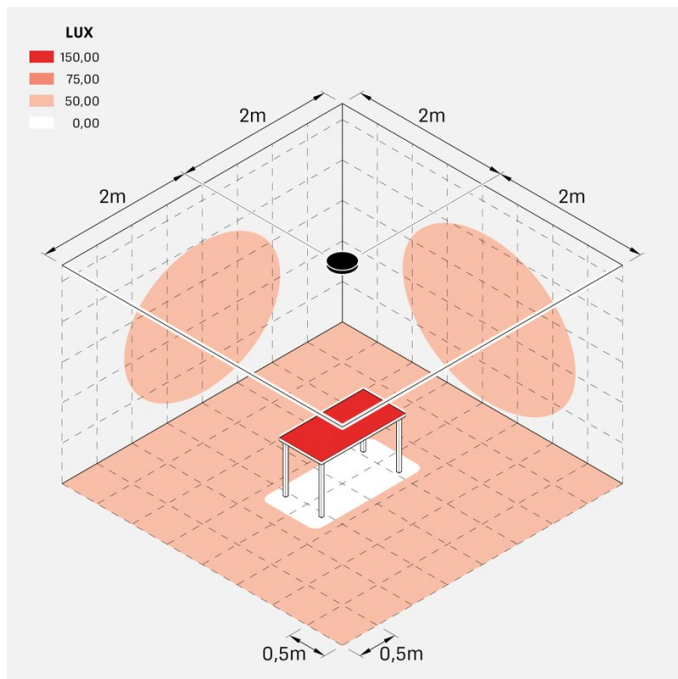

ross_330

Photometric curves:

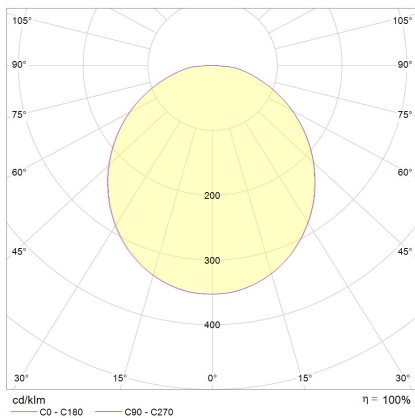

Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it