
Ross 330

LL1240213


Lombardo.






Technical information:

Installation:	Wall, Ceiling, Surface mounting wall, Surface mounting ceiling
Finish:	Black from moulding
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	D
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	25
Lumen:	3000
Real Lumen:	1842
Power supply:	integrated
LED:	220-240 V
Circuit breaker B10 - C10 - B16 - C16	22-27-32-41
Version with:	Maintained emergency 3h
Insulation class:	CL.II
Type of protection:	**IP 66**
Resistance to breakage:	**IK 10 20J xx9**
Standards and Marks of Conformity:	CE UK CA





Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Ross 330

LL1240213

Lombardo.






Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Ross 330


LL1240213

Lombardo.

Lighting simulation:

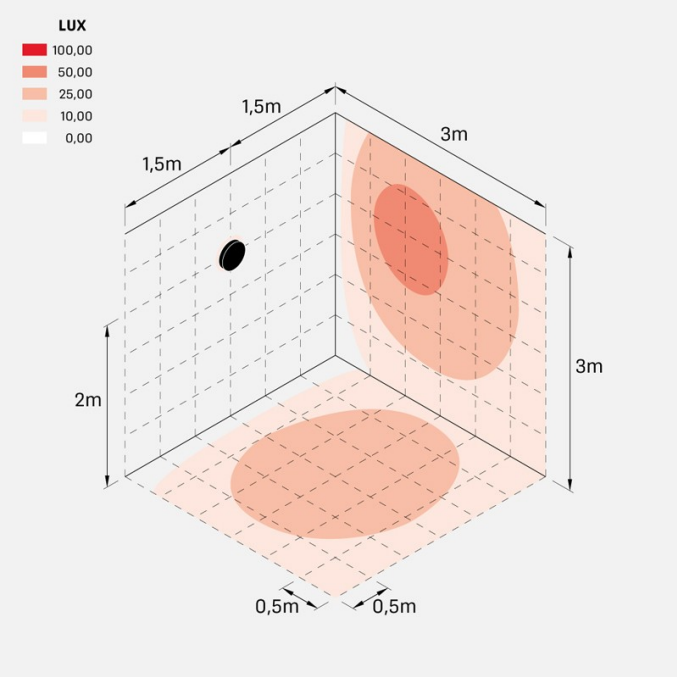


ross_330_25W_parete.jpg

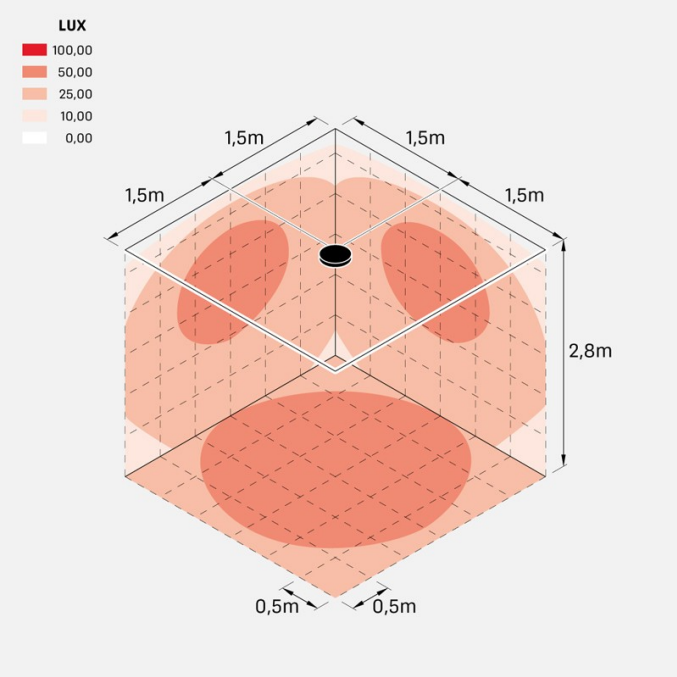

ross_330_25W_soffitto.jpg

Photometric curves:

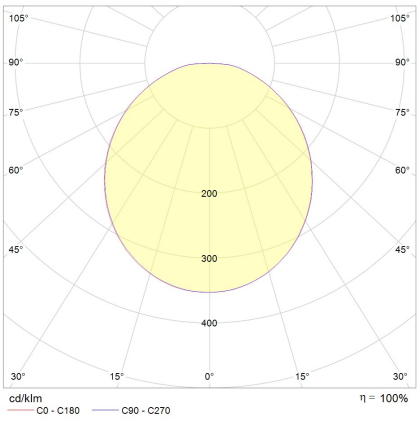

Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it