


# Ross 330


## LL124062N

# Lombardo.



### Technical information:

|                                    |  |
|------------------------------------|--|
| Installation:                      | Wall, Ceiling, Surface mounting wall, Surface mounting ceiling |
| Finish:                            | Grey High Tech RAL 9006  |
| Diffuser type:                     | Polycarbonate  |
| Lamp type:                         | LED  |
| Energy performance class:          | D  |
| Colour temperature:                | 4000K  |
| CRI:                               | >80  |
| LB Factor:                         | L80B20 - 50.000h   |
| Photobiological risk:              | RG1  |
| Power consumption (Watt):          | 25   |
| Lumen:                             | 3000   |
| Real Lumen:                        | 1842   |
| Power supply:                      | ☑ integrated   |
| LED:                               | 220-240 V  |
| Circuit breaker                    | 15-23-25-34  |
| B10 - C10 - B16 - C16              |  |
| Version with:                      | ☞ Corridor function  |
| Insulation class:                  | ☐ CL.II  |
| Type of protection:                | <b>IP 66</b>   |
| Resistance to breakage:            | <b>IK 10 20J xx9</b>   |
| Standards and Marks of Conformity: | CE UK EA   |

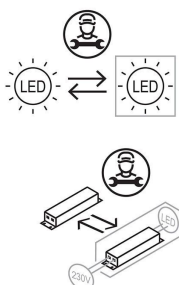

**Lombardo S.r.l.**


Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E [info@lombardo.it](mailto:info@lombardo.it)

**lombardo.it**

**Ross 330**


**Lombardo.**

LL124062N

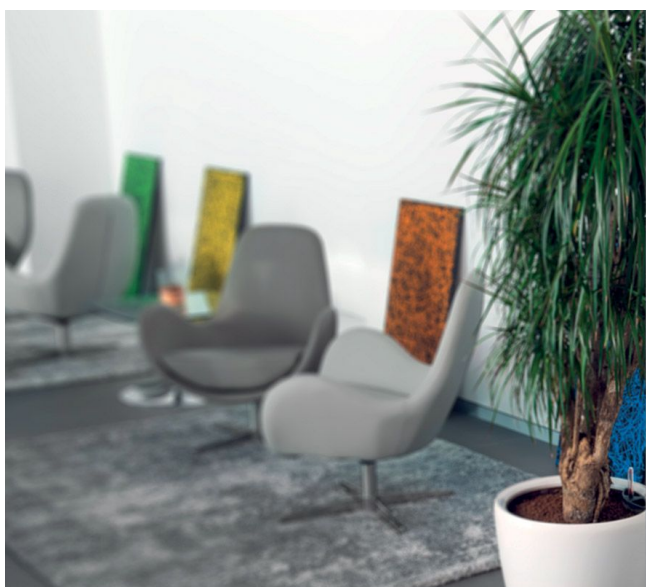

LL124062N

## Lighting simulation:

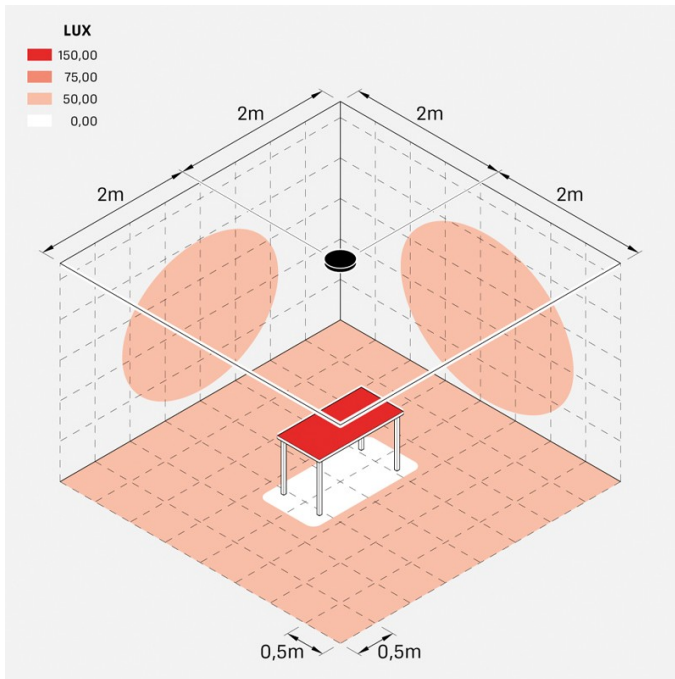

ross\_330

## Photometric curves:

