


Stile Next 503 Asimmetrico

LL643CGN

Lombardo.



Technical information:

Installation:	Wall recess
Material:	Aluminium
Finish:	Grey High Tech Serigraphy
Diffuser type:	Serigraphed glass
Lamp type:	LED
Energy performance class:	D
Colour temperature:	4000K
CRI:	>80
LB Factor:	L70B50 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	3
Lumen:	310
Real Lumen:	45
Power supply:	✓ integrated
LED:	220-240 V
Circuit breaker	44-56-65-82
B10 - C10 - B16 - C16	
Insulation class:	⊕ CL.I
Type of protection:	IP 66
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE UK CA

Single cable entry at the back. Reflector made of EN-AB44100 die-cast aluminium primary alloy.



Stile Next 503 Asimmetrico

Lombardo.

LL643CGN



Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it


lombardo.it

Stile Next 503 Asimmetrico

Lombardo.


LL643CGN

Lighting simulation:

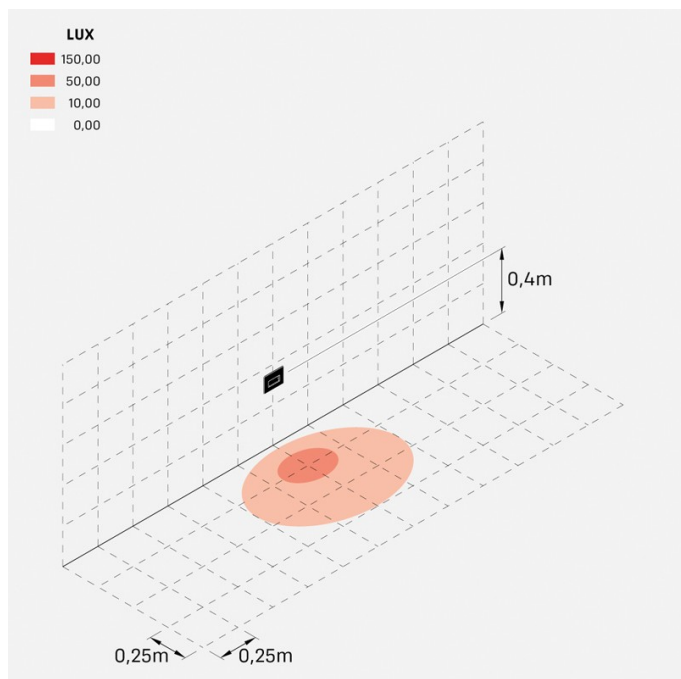

stile_next_503_asimm

Photometric curves:

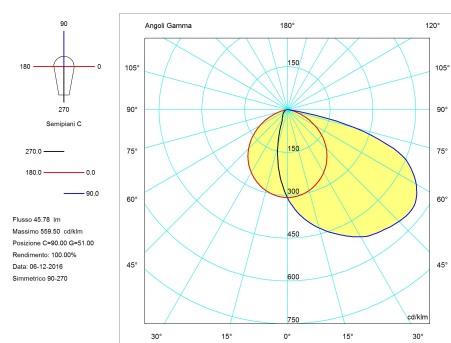

Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it