


Stile Next 506L Asimmetrico Orizzontale

LL665F23


Lombardo.



Technical information:

Installation:	Wall recess
Material:	Aluminium
Finish:	Black serigraphy
Diffuser type:	Serigraphed glass
Lamp type:	LED
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	4
Lumen:	490
Real Lumen:	70
Power supply:	☑ integrated
LED:	220-240 V
Circuit breaker	44-56-65-82
B10 - C10 - B16 - C16	
Insulation class:	⊕ CL.I
Type of protection:	IP 66
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE UK CA


Double cable entry at the back. Reflector made of EN-AB44100 die-cast aluminium primary alloy.



Stile Next 506L Asimmetrico Orizzontale

Lombardo.


IL665E23

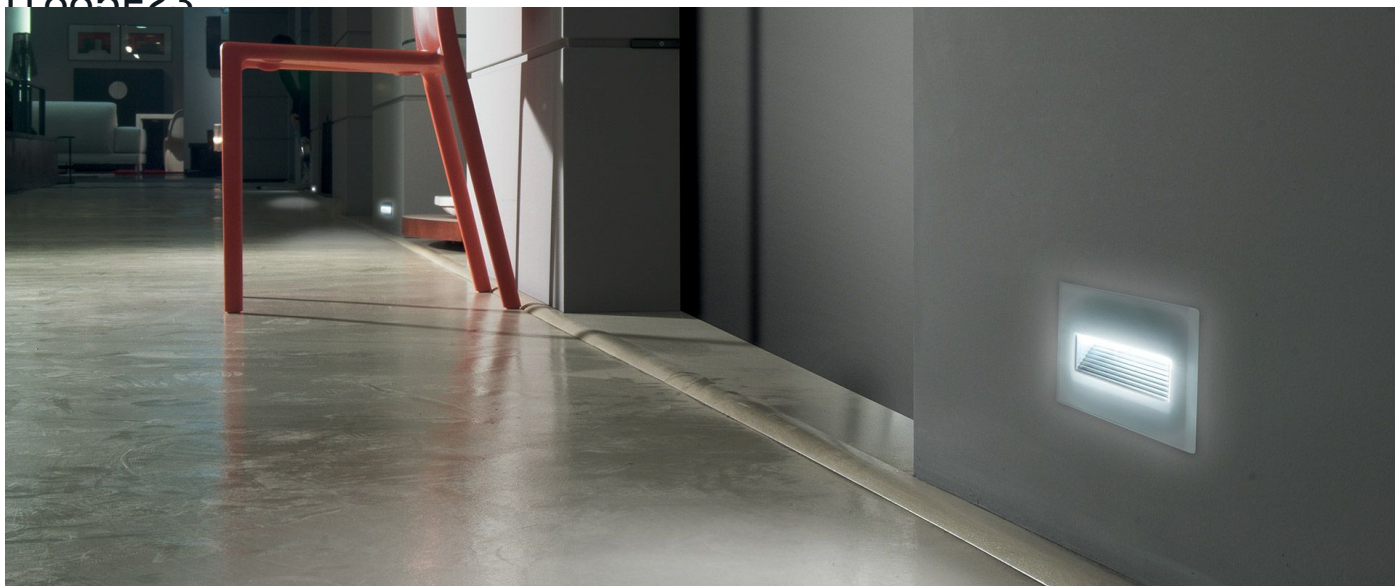

Stile Next 506L Asimmetrico Orizzontale

Lombardo.

LL665F23
Lighting simulation:

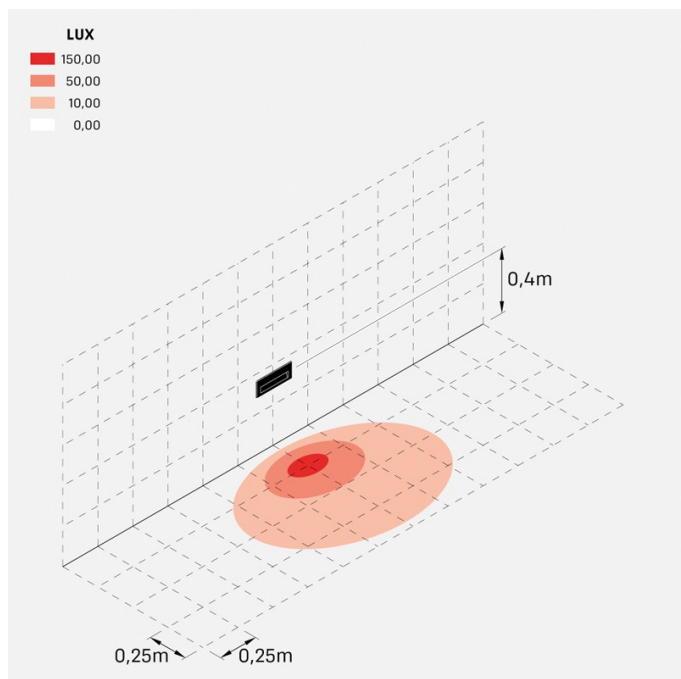

stile_next_506l_asimm_or

Photometric curves:

