

Technical information:

Installation:	Wall recess
Material:	Aluminium
Diffuser type:	Serigraphed glass
Lamp type:	LED
Energy performance class:	D
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	6
Lumen:	720
Real Lumen:	217
Power supply:	✓ integrated
LED:	220-240 V
Circuit breaker	44-56-65-82
B10 - C10 - B16 - C16	
Insulation class:	⊕ CL.I
Type of protection:	IP 66
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE UK CA

Double cable entry at the back.



Stile Next 506L

LL661D3

Lombardo.




Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it

LL661D3

Lighting simulation:

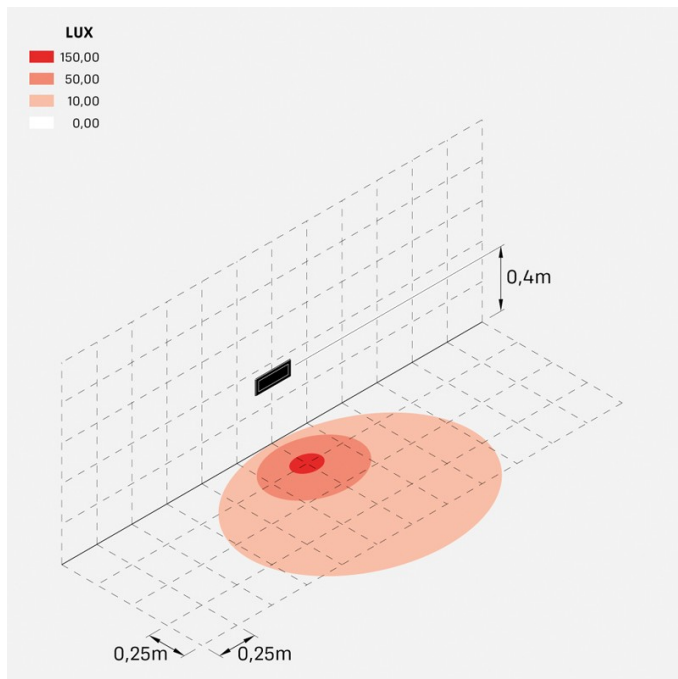

stile_next_506l

Photometric curves:

