


# Tag 110

LL115001 □

LOMBARDO



Color: Grey High Tech RAL 9006

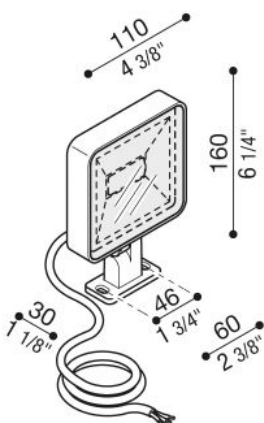

## Available colours:

White RAL 9010



Grey High Tech RAL 9006



Grey anthracite RAL 7021



Corten



## Technical information:

|                                    |                                                                    |
|------------------------------------|--------------------------------------------------------------------|
| Type of product:                   | Post, Wall                                                         |
| Diffuser type:                     | Serigraphed glass                                                  |
| Lamp type:                         | LED                                                                |
| Energy performance class:          | A++                                                                |
| Colour temperature:                | <b>N</b> 4000K<br><b>3</b> 3000K, lm -5%<br><b>2</b> 2700K, lm -5% |
| CRI:                               | >80                                                                |
| Photobiological risk:              | RG0                                                                |
| Watt:                              | 10                                                                 |
| Lumen:                             | 1200                                                               |
| Real Lumen:                        | 672                                                                |
| Power supply:                      | ✔ 220-240 V                                                        |
| Insulation class:                  | ⊕ CL.I                                                             |
| Type of protection:                | IP 66                                                              |
| Resistance to breakage:            | IK 06 1J xx3                                                       |
| Standards and Marks of Conformity: | CE                                                                 |
| Pieces per package:                | 4                                                                  |

Inaccessible device, provided with 1m of prewired power cable H05RN-F-. No risk of photobiological damage, RG0 group (EN62471).


## Product description:

Also suitable for outdoor use. Die-cast aluminium body and joint; highly resistant to oxidation thanks to the zirconium based passivation treatment and the UV stabilized polyester resin coating. Heat tempered and serigraphed glass diffuser. Aluminium reflector. Silicone gaskets to maintain IP66 rating. A4 stainless steel nuts and bolts. 180° angle adjustment. TAG 110 with highly hygroscopic dehydrating bag. **LED 4000K (N), 3000K (3) or 2700K (2). Integral ballast 220-240V.**

**Tag 110**

LL115001 □

**LOMBARDO**

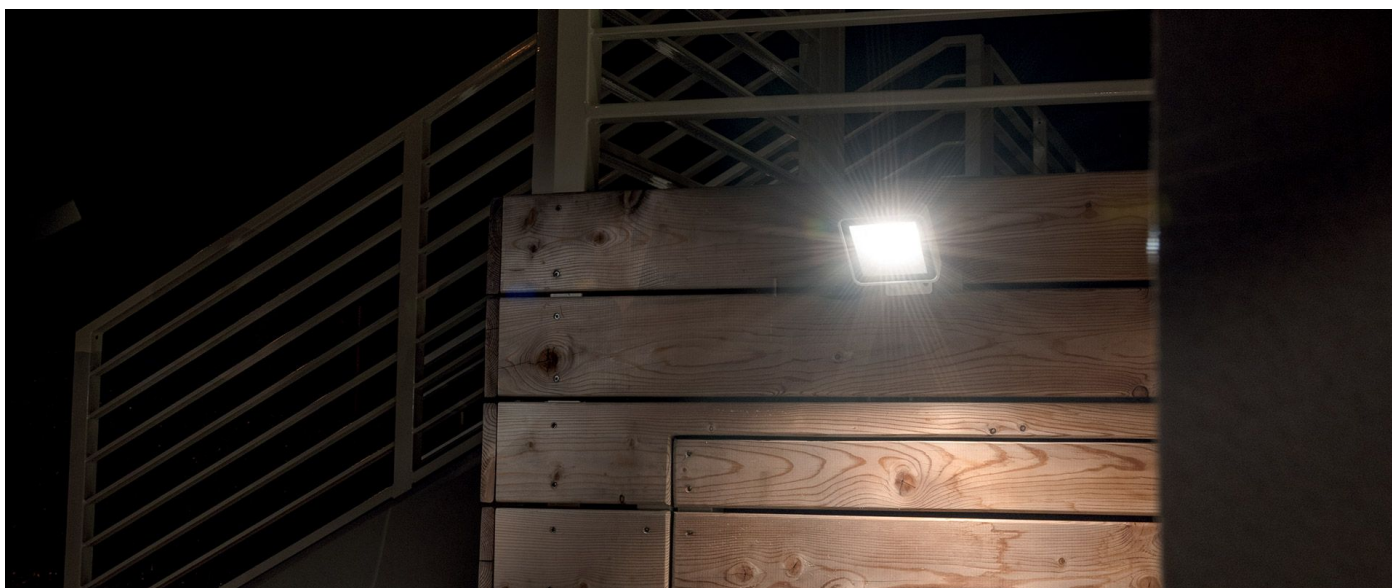

**Lombardo S.r.l.**

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - F 0039 035 939 496 - E [info@lombardo.it](mailto:info@lombardo.it)

**lombardo.it**