


Tag 210 Asimmetrico

LL1151043

Lombardo.

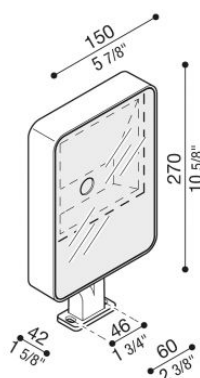

Technical information:

Installation:	Wall
Material:	Aluminium
Finish:	White RAL 9010
Diffuser type:	Serigraphed glass
Lamp type:	LED
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	25
Lumen:	3500
Real Lumen:	2386
Power supply:	✓ integrated
LED:	220-240 V
Circuit breaker	22-27-32-41
B10 - C10 - B16 - C16	
Insulation class:	⊕ CL.I
Power cable:	1 m H05RN-F
Type of protection:	IP 66
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE UK CA

Prearranged for double power input. No photobiological risk under normal operating conditions, RG1 low risk group (EN62471). **BORDO MARE**: add S to the end of the selected code including LED colour to have the product supplied with sea treatment against salt spray.



Tag 210 Asimmetrico

LL1151043

Lombardo.




Tag 210 Asimmetrico

LL1151043

Lombardo.

Lighting simulation:

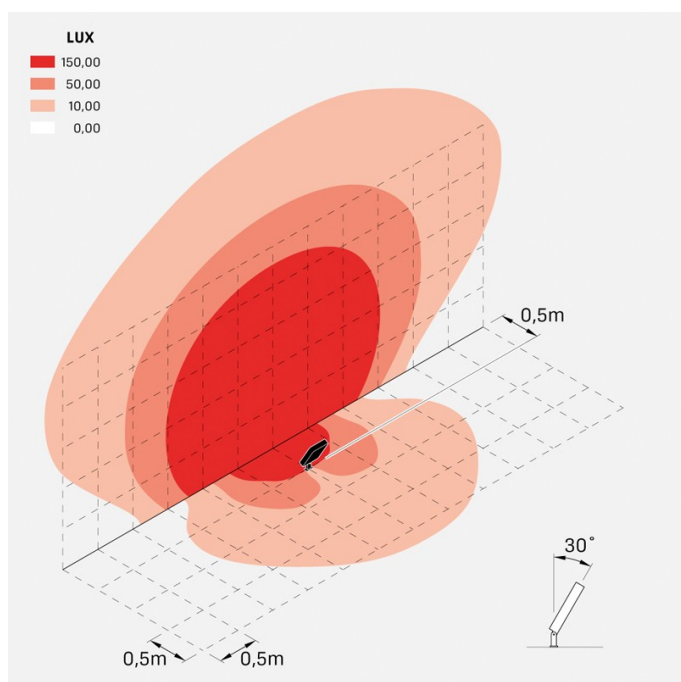

tag_210_asim

Photometric curves:

