


Technical information:

Installation:	Wall
Material:	Aluminium
Finish:	Grey anthracite RAL 7021
Diffuser type:	Serigraphed glass
Optics:	27°
Lamp type:	LED
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	35
Lumen:	4500
Real Lumen:	3120
Power supply:	✓ integrated
LED:	220-240 V
Circuit breaker	16-20-24-30
B10 - C10 - B16 - C16	
Insulation class:	⊕ CL.I
Power cable:	1 m H05RN-F
Type of protection:	IP 66
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE UK ENEC

Prearranged for double power input. No photobiological risk under normal operating conditions, RG1 low risk group (EN62471). **BORDO MARE**: add S to the end of the selected code including LED colour to have the product supplied with sea treatment against salt spray.




Tag 210 Power

LL115168S3

Lombardo.



Lighting simulation:

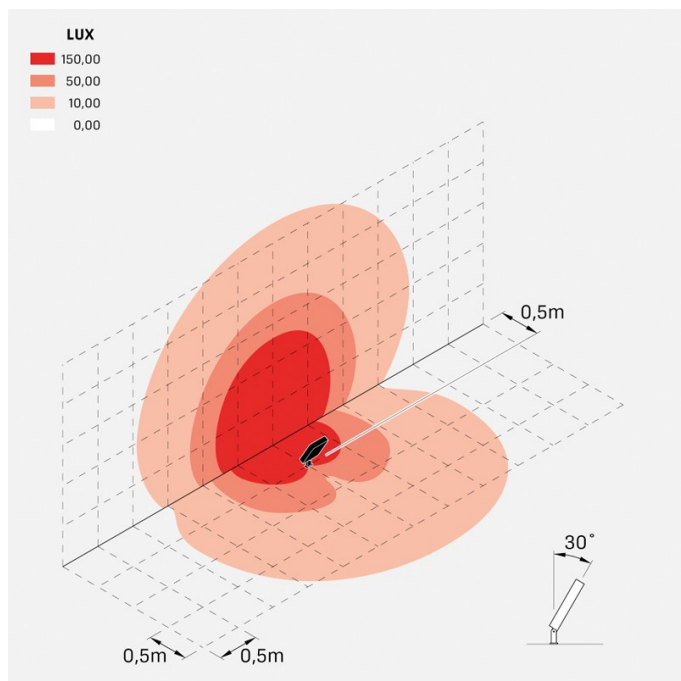

tag_210_power_optic_s