


Technical information:

Installation:	Wall, Surface mounting ground, Surface mounting wall
Material:	Aluminium
Finish:	Grey anthracite RAL 7021
Diffuser type:	Serigraphed glass
Lamp type:	LED
Colour temperature:	4000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	25
Lumen:	3500
Real Lumen:	2585
Power supply:	☑ integrated
LED:	220-240 V
Circuit breaker	22-27-32-41
	B10 - C10 - B16 - C16
Insulation class:	⊕ CL.I
Power cable:	1 m H05RN-F
Type of protection:	IP 66
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE UK

Prearranged for double power input. No photobiological risk under normal operating conditions, RG1 low risk group (EN62471). **BORDO MARE:** add S to the end of the selected code including LED colour to have the product supplied with sea treatment against salt spray.

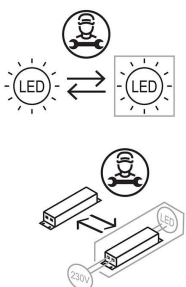


Tag 210

LL115102N

Lombardo.



Lighting simulation:

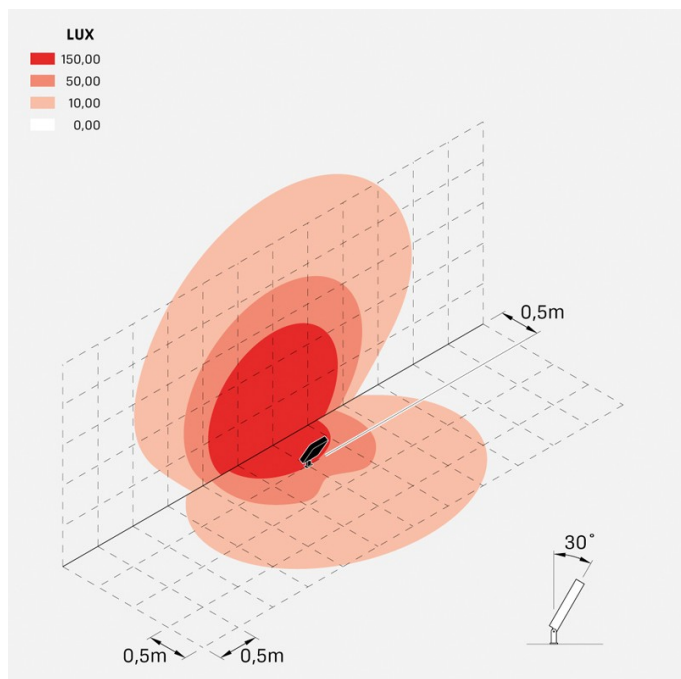

tag_210