

### Technical information:

Installation:	Ground, Wall, Surface mounting ground, Surface mounting wall, Ground recess, Wall recess
Material:	Steel
Finish:	Corten
Treatment:	Sea Treatment
Diffuser type:	Serigraphed glass
Lamp type:	LED
Energy performance class:	G
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Step MacAdam:	3
Photobiological risk:	RG1
Power consumption (Watt):	3
Lumen:	200
Real Lumen:	60
Power supply:	☑ integrated
LED:	AC DIRECT
Insulation class:	⊕ CL.I
Power cable:	0.40 m H05RN-F 3x1
Type of protection:	<b>IP 67</b>
Resistance to breakage:	<b>IK 10 20J xx9</b>
Standards and Marks of Conformity:	CE UK ER
Additional features:	☀ 50°C MAX ↓ 500 KG MAX
Dimming	Phase cut



# Tegolo

LL15201K3


# Lombardo.




## Installation images:



### Lighting simulation:

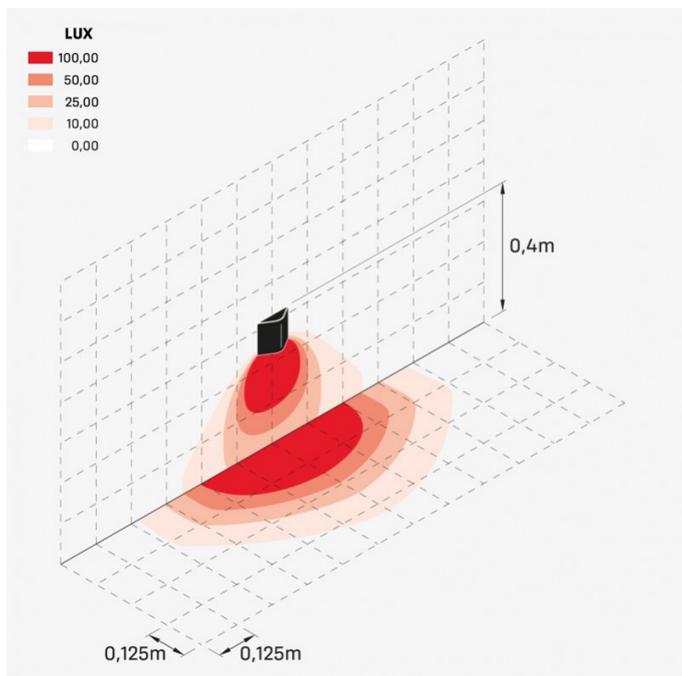

tegolo\_muro

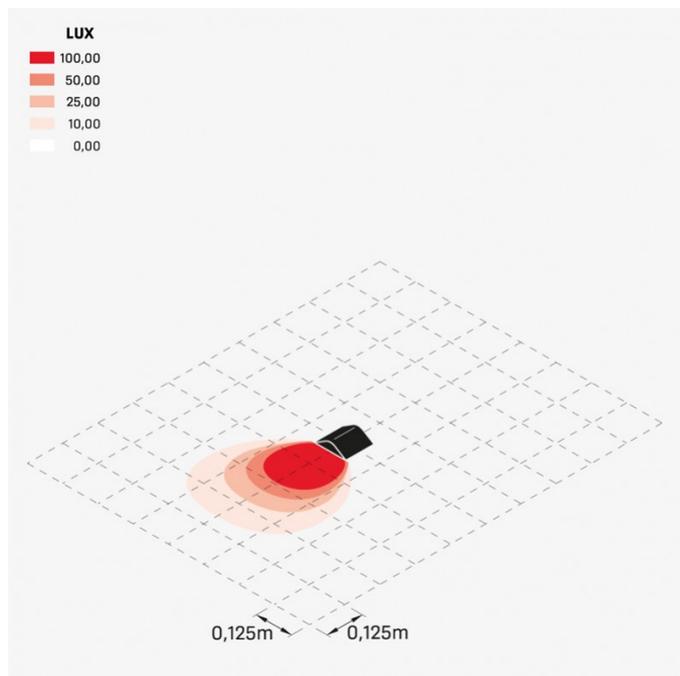

tegolo\_pavimento

### Photometric curves:

