




Tok Q H1000



DIFF. TRASP.

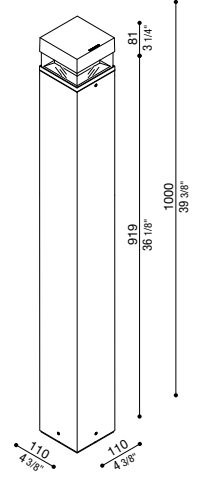

IP66 IK 10 20J xx9 CE UK CA

LED	W	LM	REAL LM	COL.	CODE *	* LED COLOUR
	14	1920	630	⊕	LL12819W□	N 4000K
				⊕	LL12819G□	3 3000K, Im -5%
				⊕	LL12819E□	2 2700K, Im -5%
				⊕	LL12819K□	

220-240 V

Emissione luminosa 360°.


Light beam 360°.

Angle d'éclairage 360°.

Tok QL H1000



DIFF. TRASP.

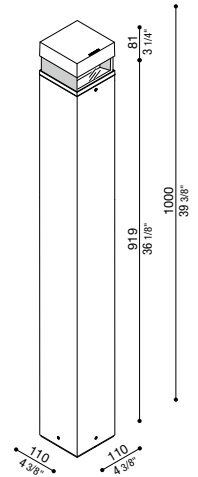

IP66 IK 10 20J xx9 CE UK CA

LED	W	LM	REAL LM	COL.	CODE *	* LED COLOUR
	5	480	140	⊕	LL12820W□	N 4000K
				⊕	LL12820G□	3 3000K, Im -5%
				⊕	LL12820E□	2 2700K, Im -5%
				⊕	LL12820K□	

220-240 V

Versione Monoemissione.


Unidirectional version.

Version unidirectionnelle.

Tok Q2L H1000



DIFF. TRASP.

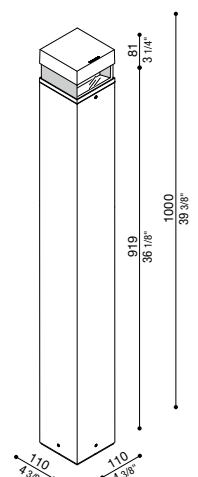

IP66 IK 10 20J xx9 CE UK CA

LED	W	LM	REAL LM	COL.	CODE *	* LED COLOUR
	8	960	180	⊕	LL12821W□	N 4000K
				⊕	LL12821G□	3 3000K, Im -5%
				⊕	LL12821E□	2 2700K, Im -5%
				⊕	LL12821K□	

220-240 V

Versione Biemissione.

Bidirectional version.

Version bidirectionnelle.