


# Trend 60 Post H600

LL1292062


**Lombardo.**

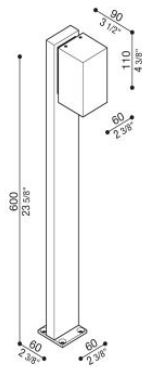

## Technical information:

Installation:	Ground
Material:	Aluminium
Finish:	Grey anthracite RAL 7021
Treatment:	Sea Treatment
Diffuser type:	Serigraphed glass
Lamp type:	LED
Energy performance class:	E
Colour temperature:	2700K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	3
Lumen:	500
Real Lumen:	250-260
Power supply:	☑ integrated
LED:	220-240 V
Circuit breaker	44-56-65-82
B10 - C10 - B16 - C16	
Insulation class:	⊕ CL.I
Type of protection:	<b>IP 66</b>
Resistance to breakage:	<b>IK 07 2J xx5</b>
Standards and Marks of Conformity:	CE UK EA

Asymmetrical beam. H 600 mm.



# Trend 60 Post H600

Lombardo.

LL1292062




# Trend 60 Post H600


Lombardo.

LL1292062

## Lighting simulation:

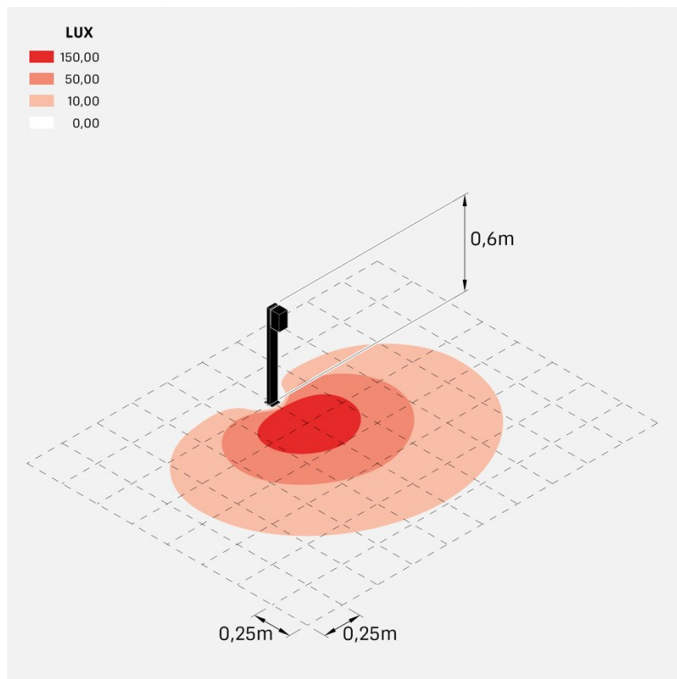

trend\_60\_post600\_diffuso

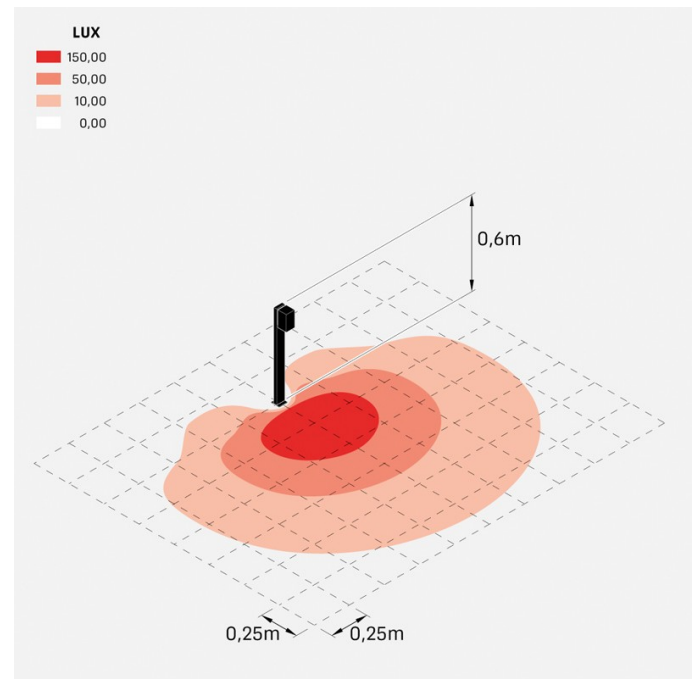

trend\_60\_post600\_trasp