














Flag 200 Reg













IP66 IK 07 2J xx5 CE UK ER	LED		REAL LM	COL.	CODE *
	W	LM			
	10	1350	Max 855	☐ ✓ 220-240 V	 LL14011W○□
					 LL14011G○□
					 LL14011E○□
					 LL14011K○□
	10	1350	Max 855	☐ ✓ 220-240 V DALI	 LM14011W○□
					 LM14011G○□
					 LM14011E○□
					 LM14011K○□
	10	1350	Max 855	⊕ ⊗ 24V	 LT14011W○□
					 LT14011G○□
					 LT14011E○□
					 LT14011K○□




* Complete the CODE ○ OPTIC S | Spot-30° W | Wide A | Asymm. D | Diff. □ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

Fornito con staffa a 5 step di regolazione in alluminio verniciato. | Supplied with 5-step adjustment bracket in painted aluminium. | Fourni avec un support de réglage en 5 étapes en aluminium peint.

Flag 200 Bollard

IP66 IK 07 2J xx5 CE UK ER	LED		REAL LM	COL.	CODE *
	W	LM			
	10	1350	Max 855	☐ ✓ 220-240 V	 LL14021W○□
					 LL14021G○□
					 LL14021E○□
					 LL14021K○□
	10	1350	Max 855	☐ ✓ 220-240 V DALI	 LM14021W○□
					 LM14021G○□
					 LM14021E○□
					 LM14021K○□
	10	1350	Max 855	⊕ ⊗ 24V	 LT14021W○□
					 LT14021G○□
					 LT14021E○□
					 LT14021K○□

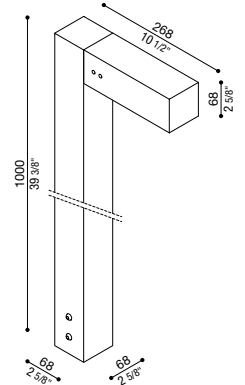

* Complete the CODE ○ OPTIC S | Spot-30° W | Wide A | Asymm. D | Diff. □ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

Palo H1000 e staffa di fissaggio inclusi. | H1000 pole and fixing base included. | Poteau H1000 et base de fixation inclus.