



Ago Garden

LED									
W	LM	REAL LM		COL.	CODE *				
6	700	568	⊕ ⊙ AC DIRECT		LL126000	□ □			
					LL126001	□ □			
					LL126002	□ □			
					LL126003	□ □			
6	700	568	⊕ ⊗ 24V		LT126000	□ □			
					LT126001	□ □			
					LT126002	□ □			
					LT126003	□ □			

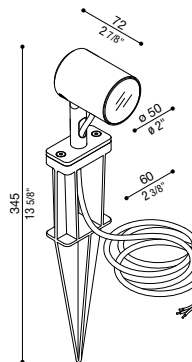

* Complete the CODE □ OPTIC D | Diff. S | 25° M | 40° L | 65° □ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

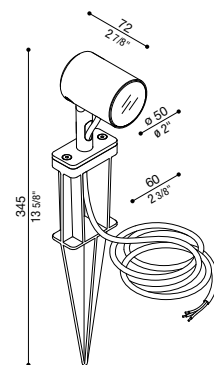


★ Complete the CODE ○ OPTIC D | Diff. S | 25° M | 40° L | 65° □ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

Cavo anti-risalita umidità versione AC-Direct: 0,8m H05RN-F 3×1. Cavo anti-risalita umidità versione 24V: 0,8m H05RN-F 2×0,75. | AC-Direct version, anti-rising damp cable: 0.8m H05RN-F 3×1. Cable 24V, anti-rising damp version: 0.8m H05RN-F 2×0.75. | Câble anti-remontée d'humidité version AC-Direct : 0,8m H05RN-F 3×1. Câble anti-remontée d'humidité version 24V : 0,8m H05RN-F 2×0,75. | Cable antihumedad ascendente versión AC-Direct: 0,8m H05RN-F 3×1. Cable antihumedad ascendente versión 24V: 0,8m H05RN-F 2×0,75.


Ago Garden Power

LED							
W	LM	REAL LM		COL.	CODE *		
10	1100	933	⊕ ⊙ AC DIRECT		LL126100□□		
					LL126101□□		
					LL126102□□		
					LL126103□□		
10	1100	933	⊕ ⊗ 24V		LT126100□□		
					LT126101□□		
					LT126102□□		
					LT126103□□		

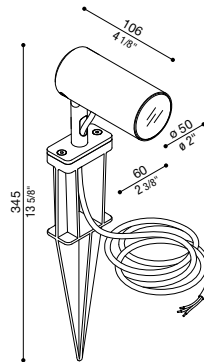

* Complete the CODE

□	OPTIC	D	Diff	S	125°	M	140°	L	165°	□	LED COLOUR	N	14000K	3	3000K	2	2700K	1	2200K
---	-------	---	------	---	------	---	------	---	------	---	------------	---	--------	---	-------	---	-------	---	-------

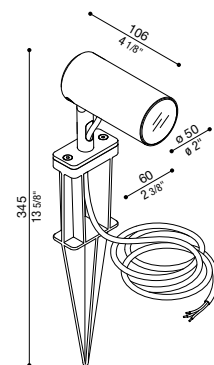


★ Complete the CODE ○ OPTIC D | Diff. S | 25° M | 40° L | 65° □ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

Cavo anti-risalita umidità versione AC-Direct: 0,8m H05RN-F 3×1. Cavo anti-risalita umidità versione 24V: 0,8m H05RN-F 2×0,75. | AC-Direct version, anti-rising damp cable: 0.8m H05RN-F 3×1. Cable 24V, anti-rising damp version: 0.8m H05RN-F 2×0.75. | Câble anti-remontée d'humidité version AC-Direct : 0,8m H05RN-F 3×1. Câble anti-remontée d'humidité version 24V : 0,8m H05RN-F 2×0,75. | Cable antihumedad ascendente versión AC-Direct: 0,8m H05RN-F 3×1. Cable antihumedad ascendente versión 24V: 0,8m H05RN-F 2×0,75.


Ago Wall

LED									
IP66 IK 07 2J xx5	W	LM	REAL LM		COL.	CODE *			
CE UK CA	6	700	568	⊕ ⊙ AC DIRECT		LL126004	□	□	
						LL126005	□	□	
						LL126006	□	□	
						LL126007	□	□	
	6	700	568	⊕ ⊗ 24V		LT126004	□	□	
						LT126005	□	□	
						LT126006	□	□	
						LT126007	□	□	



* Complete the CODE ○ OPTIC D | Diff. S | 25° M | 40° L | 65° □ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

Cavo anti-risalta umidità versione AC-Direct: 0,8m H05RN-F 3×1. Cavo anti-risalta umidità versione 24V: 0,8m H05RN-F 2×0.75. AC-Direct version, anti-rising



★ Complete the CODE ○ OPTIC D | Diff. S | 25° M | 40° L | 65° □ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

Cavo anti-risalita umidità versione AC-Direct: 0,8m H05RN-F 3×1. Cavo anti-risalita umidità versione 24V: 0,8m H05RN-F 2×0,75. | AC-Direct version, anti-rising damp cable: 0.8m H05RN-F 3×1. Cable 24V, anti-rising damp version: 0.8m H05RN-F 2×0.75. | Câble anti-remontée d'humidité version AC-Direct : 0,8m H05RN-F 3×1. Câble anti-remontée d'humidité version 24V : 0,8m H05RN-F 2×0,75. | Cable antihumedad ascendente versión AC-Direct: 0,8m H05RN-F 3×1. Cable antihumedad ascendente versión 24V: 0,8m H05RN-F 2×0,75.