


Clic Garden

IP 65 IK 06 1J xx3 CE UK CA	LED			COL.	CODE *
	W	LM	REAL LM		
	5	600	362	⊕ ⊙ AC DIRECT	LL14803B□ LL14803D□ LL14803K□ LL14803V□
	LAMP				
			ATT. MAX	CFL	
			GU10 1x7	□	LU14803B LU14803K

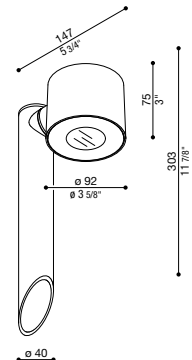


★ Complete the CODE □ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

Versione GU10: lampadina non inclusa. | GU10 version: light bulb not included. | Version GU10: ampoule non incluse. | Versión GU10: bombilla no incluida.

Clic Up Garden

IP 65 IK 06 1J xx3 CE UK CA	LED			COL.	CODE *
	W	LM	REAL LM		
	5	600	330	⊕ ⊙ AC DIRECT	LL14813B□ LL14813D□ LL14813K□ LL14813V□
	LAMP				
			ATT. MAX	CFL	
			GU10 1x7	□	LU14813B LU14813K

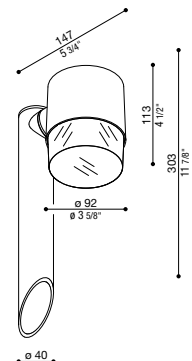

★ Complete the CODE □ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

Versione GU10: lampadina non inclusa. | GU10 version: light bulb not included. | Version GU10: ampoule non incluse. | Versión GU10: bombilla no incluida.

Accessori | Accessories | Accessoires | Accesorios

Bus DALI

Varialuce universale comandabile con segnale PUSH/DALI.
Dimmerazione a Taglio di Fase discendente (a fine fase) IGBT Trailing-Edge.

Bus DALI

Universal dimmer controlled by PUSH/DALI signal. Descending Phase Cutting dimming (at the end of the phase) IGBT Trailing-Edge.

Bus DALI

Variateur universel commandé par un signal PUSH/DALI. Phase descendante Gradation par coupure (à la fin de la phase) IGBT Trailing-Edge.

Bus DALI

Dimmer universal controlado por señal PUSH/DALI. Atenuación por corte de fase descendente (al final de la fase) IGBT Trailing-Edge.

Col.	Code
	LB1070110

