

Lombardo.
EVERYDAY LIGHT



LULA







Lombardo.
EVERYDAY LIGHT

LULA

The range



Led light




Outdoor



GROUND | FLOOR

- 1 LULA STELO 2400
- 2 LULA UP STELO 1200
- 3 KIT LULA POST

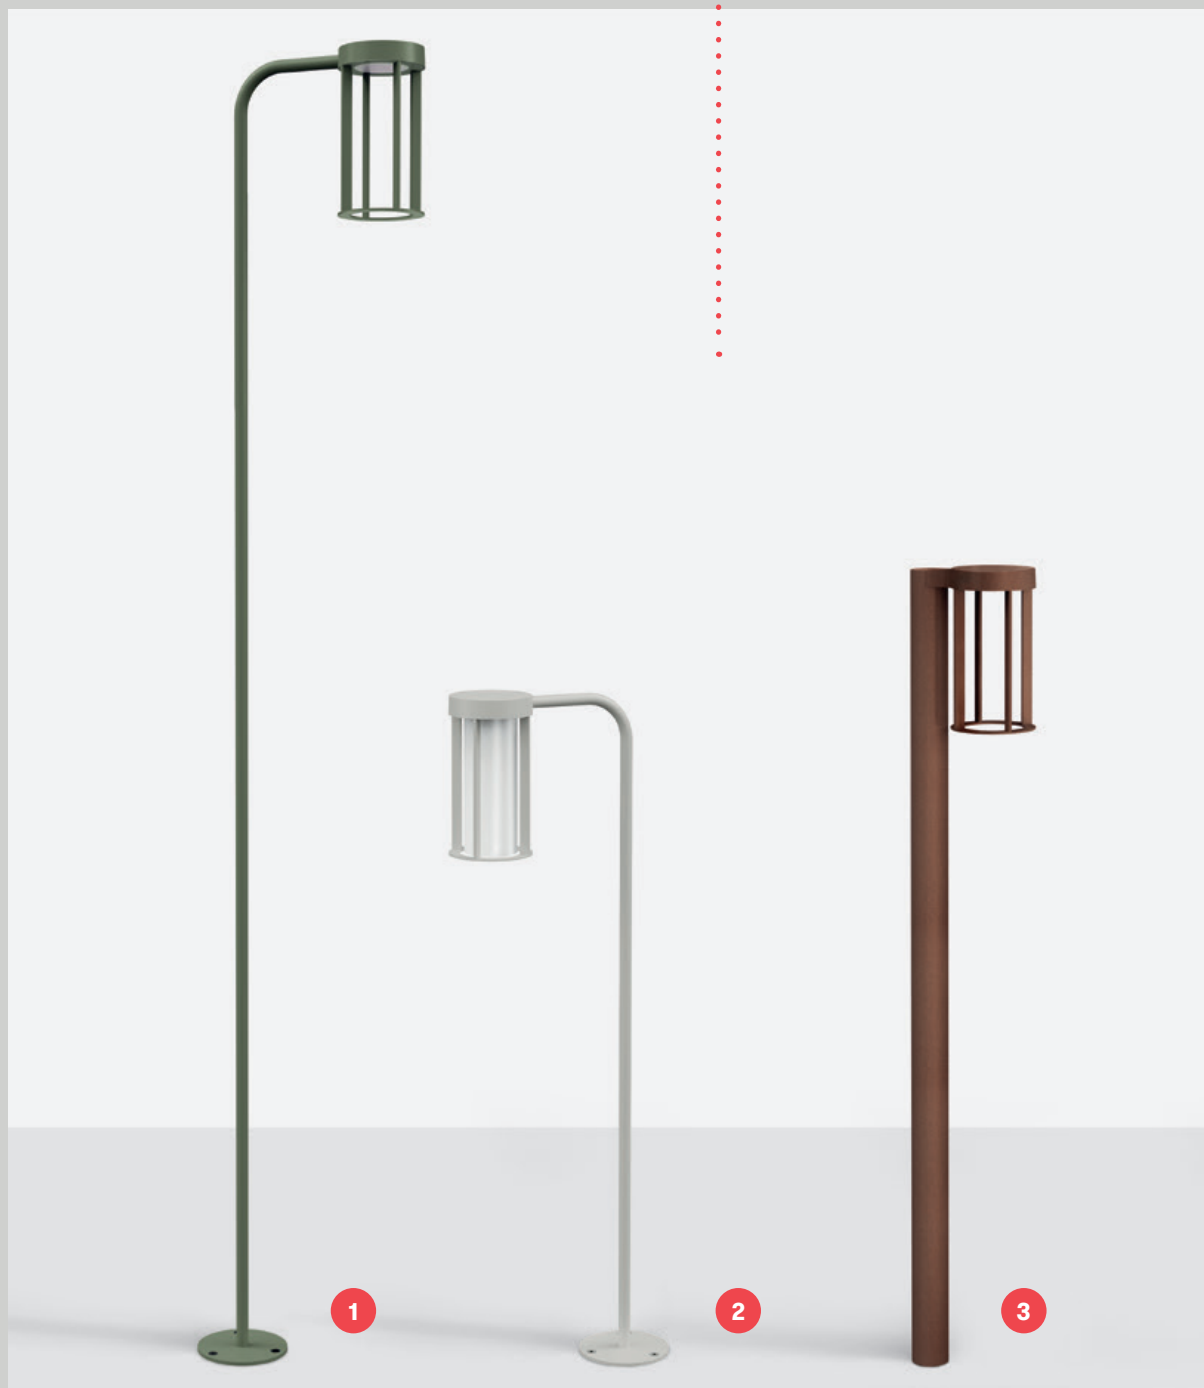

WALL

- 4 LULA BRACKET 500
- 5 LULA UP BRACKET 300
- 6 LULA BRACKET 150
- 7 LULA UP
- 8 LULA



LULA

Installazione Installation Instalación	Parete Wall Mur Pared
Materiali Materials Materiál Materiales	Materiale Corpo: Alluminio Tipo di diffusore: Policarbonato - Vetro satinato Trattamento: Bordo Mare Material: Aluminium Diffuser type: Polycarbonate - Frosted glass Treatment: Sea Treatment Matériel du corps: Aluminium Type de diffuseur: Polycarbonate - Verre effet satiné Traitement: Bord de Mer Material del cuerpo: Aluminio Tipo de difusor: Policarbonato - Cristal efecto satinado Tratamiento: Tratamiento marino
Alimentazione Power supply Alimentation Alimentación	AC DIRECT
Versioni Versions Versions Versiones	Taglio di fase Phase cut Coupure de phase Corte de fase



LULA



LULA UP



COLOURS



White RAL 9010



Light Grey RAL 7044



Dark Grey RAL 7021




Corten



Green RAL 6003



Black RAL 9005



Brown Bronze


Adattatore palo Still Ø 60 Lula

Lula adapter for Still Post Ø 60

Adaptateur poteau Still Ø60 Lula

Adaptador poste Still Ø60 Lula

Col.	Code
	LB153000W
	LB153000B
	LB153000K



Tappo Palo Still

Tappo in polietilene.

Cap for Post Still

Polyethylene cap.


Couvercle Poteau Still

Couvercle en polyéthylène.

Tapón Palo Still

Tapón de polietileno

Col.	Code
	LB1100081
	LB1100082
	LB110008K



Still

Palo diametro 60 mm in Bayblend senza basamento.

Possibilità di installazione con o senza basamento.

Anima interna palo in acciaio zincato per altezze da 2000 mm.

I pali di altezza uguale e superiore a 2000 mm devono essere interrati di almeno 500 mm.

Still

60 mm Bayblend pole without base.

Possibility of installation with or without base.

Galvanized steel inner pole from H 2000 mm.

2000 mm and higher poles must be underground by at least 500 mm.

Still

Poteau de 60 mm en Bayblend sans socle.

Possibilité d'installation avec ou sans socle.

Noyau interne en acier galvanisé pour poteau à partir de h. 2000 mm.

Les poteaux d'une hauteur de 2000 mm et plus doivent être enterrés à au moins 500 mm de profondeur.

Still

Poste de 60 mm en Bayblend sin base.

Posibilidad de instalación con o sin base.

Núcleo interno en acero galvanizado para alturas de 2000 mm.

Los postes con una altura de 2.000 mm o superior deben estar enterrados a una profundidad mínima de 500 mm.

Still H 500 mm

Col.	Code
	LB111111
	LB111112
	LB11111K

Still H 1000 mm

Col.	Code
	LB110001W
	LB1100012
	LB110001K

Still H 1500 mm

Col.	Code
	LB1100021
	LB1100022
	LB110002K

Still H 2000 mm

Col.	Code
	LB1100031
	LB1100032
	LB110003K

Still H 2500 mm


Col.	Code
	LB1100041
	LB1100042
	LB110004K

Still H 3000 mm

Col.	Code
	LB1100051
	LB1100052
	LB110005K

Still H 3500 mm

Col.	Code
	LB1100061
	LB1100062
	LB110006K





LULA BRACKET


Installazione Installation Instalación	Parete Wall Mur Pared
Materiali Materials Material Materiales	Materiale Corpo: Alluminio Tipo di diffusore: Policarbonato - Vetro satinato Trattamento: Bordo Mare Material: Aluminium Diffuser type: Polycarbonate - Frosted glass Treatment: Sea Treatment Matériel du corps: Aluminium Type de diffuseur: Polycarbonate - Verre effet satiné Traitement: Bord de Mer Material del cuerpo: Aluminio Tipo de difusor: Policarbonato - Cristal efecto satinado Tratamiento: Tratamiento marino
Alimentazione Power supply Alimentation Alimentación	AC DIRECT
Versioni Versions Versions Versiones	Taglio di fase Cavo Alimentazione: 1 metro H05RN-F 3×1 Phase cut Power cable: 1 m H05RN-F 3×1 Coupure de phase Câble d'alimentation: 1 m H05RN-F 3×1 Corte de fase Cable de alimentación: 1 m H05RN-F 3×1



LULA BRACKET
150



LULA UP BRACKET
150



LULA BRACKET
300



LULA UP BRACKET
300



LULA BRACKET
500



LULA UP BRACKET
500

COLOURS



White RAL 9010



Light Grey RAL 7044



Dark Grey RAL 7021




Corten



Green RAL 6003



Black RAL 9005



Brown Bronze

Lula Bracket 150

NEW

IP 65 IK 06 1J xx3

CE UK CA

LED		COL.		CODE *
W	LM	REAL LM		
12	1330	800	AC DIRECT	LL15303W□
				LL15303L□
				LL15303D□
				LL15303K□
				LL15303V□
				LL15303B□
				LL15303M□

* Complete the CODE ☐ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

Lula UP Bracket 150

NEW

IP 65 IK 03 0,35J xx2

CE UK CA

LED		COL.		CODE *
W	LM	REAL LM		
12	1330	1100	AC DIRECT	LL15304W□
				LL15304L□
				LL15304D□
				LL15304K□
				LL15304V□
				LL15304B□
				LL15304M□

* Complete the CODE ☐ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

Lula Bracket 300

NEW

IP 65 IK 06 1J xx3

CE UK CA

LED		COL.		CODE *
W	LM	REAL LM		
12	1330	800	AC DIRECT	LL15305W□
				LL15305L□
				LL15305D□
				LL15305K□
				LL15305V□
				LL15305B□
				LL15305M□

* Complete the CODE ☐ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

Lula UP Bracket 300

NEW

IP 65 IK 03 0,35J xx2

CE UK CA

LED		COL.		CODE *
W	LM	REAL LM		
12	1330	1100	AC DIRECT	LL15306W□
				LL15306L□
				LL15306D□
				LL15306K□
				LL15306V□
				LL15306B□
				LL15306M□

* Complete the CODE ☐ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

LULA BRACKET

Lula Bracket 500



IP 65 IK 06 1J xx3

CE UK CA

LED				
W	LM	REAL LM	COL.	CODE *
12	1330	800	AC DIRECT	LL15307W□
				LL15307L□
				LL15307D□
				LL15307K□
				LL15307V□
				LL15307B□
				LL15307M□

* Complete the CODE ☐ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

Lula UP Bracket 500



IP 65 IK 03 0,35J xx2

CE UK CA

LED				
W	LM	REAL LM	COL.	CODE *
12	1330	1100	AC DIRECT	LL15308W□
				LL15308L□
				LL15308D□
				LL15308K□
				LL15308V□
				LL15308B□
				LL15308M□

* Complete the CODE ☐ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

LULA UP BRACKET - LULA UP STELO



LULA UP BRACKET



LULA STELO

Installazione Installation Installación	Terra Ground Sol Suelo
Materiali Materials Materiales	Materiale Corpo: Alluminio Tipo di diffusore: Policarbonato - Vetro satinato Trattamento: Bordo Mare Material: Aluminium Diffuser type: Polycarbonate - Frosted glass Treatment: Sea Treatment Matériel du corps: Aluminium Type de diffuseur: Polycarbonate - Verre effet satiné Traitement: Bord de Mer Material del cuerpo: Aluminio Tipo de difusor: Policarbonato - Cristal efecto satinado Tratamiento: Tratamiento marino
Alimentazione Power supply Alimentation Alimentación	AC DIRECT
Versioni Versions Versiones	Taglio di fase Cavo Alimentazione: 5 metri H05RN-F 3×1 Phase cut Power cable: 5 m H05RN-F 3×1 Coupure de phase Câble d'alimentation: 5 m H05RN-F 3×1 Corte de fase Cable de alimentación: 5 m H05RN-F 3×1



LULA STELO
H1200



LULA UP STELO
H1200



LULA STELO
H2400



LULA UP STELO
H2400



IP 65



AC DIRECT
LED 220-240 V



BORDO MARE



DIMMABLE



5 YEARS WARRANTY

COLOURS



White RAL 9010



Light Grey RAL 7044



Dark Grey RAL 7021




Corten



Green RAL 6003



Black RAL 9005



Brown Bronze

Lula Stelo H1200



IP 65 IK 06 1J xx3

CE UK CA

LED			COL.	CODE *
W	LM	REAL LM		
12	1330	800	AC DIRECT	LL15309W□
				LL15309L□
				LL15309D□
				LL15309K□
				LL15309V□
				LL15309B□
				LL15309M□

* Complete the CODE

□ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

Lula UP Stelo H1200



IP 65 IK 03 0,35J xx2

CE UK CA

LED			COL.	CODE *
W	LM	REAL LM		
12	1330	1100	AC DIRECT	LL15310W□
				LL15310L□
				LL15310D□
				LL15310K□
				LL15310V□
				LL15310B□
				LL15310M□

* Complete the CODE

□ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

Lula Stelo H2400



IP 65 IK 06 1J xx3

CE UK CA

LED			COL.	CODE *
W	LM	REAL LM		
12	1330	800	AC DIRECT	LL15311W□
				LL15311L□
				LL15311D□
				LL15311K□
				LL15311V□
				LL15311B□
				LL15311M□

* Complete the CODE

□ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

Lula UP Stelo H2400



IP 65 IK 03 0,35J xx2

CE UK CA

LED			COL.	CODE *
W	LM	REAL LM		
12	1330	1100	AC DIRECT	LL15312W□
				LL15312L□
				LL15312D□
				LL15312K□
				LL15312V□
				LL15312B□
				LL15312M□

* Complete the CODE

□ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K



LULA STELO H2400



KIT LULA POST

Installazione Installation Installation Instalación	Terra Ground Sol Suelo
Materiali Materials Materiali Materiales	Materiale Corpo: Alluminio Tipo di diffusore: Policarbonato - Vetro satinato Trattamento: Bordo Mare Material: Aluminium Diffuser type: Polycarbonate - Frosted glass Treatment: Sea Treatment Matériel du corps: Aluminium Type de diffuseur: Polycarbonate - Verre effet satiné Traitement: Bord de Mer Material del cuerpo: Aluminio Tipo de difusor: Policarbonato - Cristal efecto satinado Tratamiento: Tratamiento marino
Alimentazione Power supply Alimentation Alimentación	AC DIRECT
Versioni Versions Versions Versiones	Taglio di fase Phase cut Coupure de phase Corte de fase



KIT LULA POST
H1500



KIT LULA UP POST
H1500



COLOURS



White RAL 9003



Corten



Black RAL 9005

Kit Lula Post H1500



IP 65 IK 06 1J xx3

CE UK CA

LED						
W	LM	REAL LM		COL.	CODE *	
12	1330	800	⊕ ✓	AC DIRECT		
					LL15313W□	
					LL15313K□	
					LL15313B□	

* Complete the CODE ☐ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

Kit composto da Lula, Adattatore Palo Still Ø60 Lula, Palo Still, Tappo Palo Still e Piastra base a scomparsa. | Kit consisting of Lula, Lula adapter for Still Post Ø60, Still Post, Cap for Post Still, Retractable plate base. | Kit composé de Lula, Adaptateur poteau Still Ø60 Lula, Poteau Still, Couvercle Poteau Still, Plaque de base rétractable. | Kit compuesto por Lula, Adaptador poste Still Ø60 Lula, Poste Still, Tapón Palo Still, Placa base oculta.

Kit Lula UP Post H1500



IP 65 IK 03 0,35J xx2

CE UK CA

LED						
W	LM	REAL LM		COL.	CODE *	
12	1330	1100	⊕ ✓	AC DIRECT		
					LL15314W□	
					LL15314K□	
					LL15314B□	

* Complete the CODE ☐ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K 1 | 2200K

Kit composto da Lula UP, Adattatore Palo Still Lula, Palo Still, Tappo Palo Still e Piastra base a scomparsa. | Kit consisting of Lula UP, Lula adapter for Still Post Ø60, Still Post, Cap for Post Still, Retractable plate base. | Kit composé de Lula UP, Adaptateur poteau Still Ø60 Lula, Poteau Still, Couvercle Poteau Still, Plaque de base rétractable. | Kit compuesto por Lula UP, Adaptador poste Still Ø60 Lula, Poste Still, Tapón Palo Still, Placa base oculta.

KIT LULA POST H1500



KIT LULA POST H1500





FEATURES

**Fasci di luce.**

Light beams.
Faisceaux lumineux.
Haces de luz.



Lula

Lula UP

**Colori disponibili.**

Available colours.
Couleurs disponibles.
Colores disponibles.





Lombardo.

E V E R Y D A Y L I G H T

Via Pizzigoni 3 • Villongo (BG) • 24060 • Italy
T +39 035 939 411 • F +39 035 939 496
info@lombardo.it

lombardo.it