


Kit 06 - Tag 210 Asimmetrico Garden

Lombardo.

LL1151252

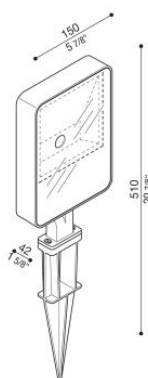

Technical information:

| | |
|------------------------------------|--------------------------|
| Installation: | Ground |
| Material: | Aluminium |
| Finish: | Grey anthracite RAL 7021 |
| Diffuser type: | Serigraphed glass |
| Lamp type: | LED |
| Colour temperature: | 2700K |
| CRI: | >80 |
| LB Factor: | L80B20 - 50.000h |
| Photobiological risk: | RG1 |
| Power consumption (Watt): | 25 |
| Lumen: | 3500 |
| Real Lumen: | 2386 |
| Power supply: | ☑ integrated |
| LED: | 220-240 V |
| Circuit breaker | 22-27-32-41 |
| B10 - C10 - B16 - C16 | |
| Insulation class: | Ⓜ CL.I |
| Power cable: | 1 m H05RN-F |
| Type of protection: | IP 66 |
| Resistance to breakage: | IK 06 1J xx3 |
| Standards and Marks of Conformity: | CE UK CA |

Kit consisting of TAG 210 Asimmetrico + LB1150035. **BORDO MARE:** add S to the end of the selected code including LED colour to have the product supplied with sea treatment against salt spray. Powder coating (on metal) ensures a matt and textured finish, while liquid coating (on plastic) provides brighter and more uniform aesthetic effects. The combined use of aluminium and plastic components can lead to variations in colour rendering, affecting the visual homogeneity of the final product.

