

### Technical information:

Installation:	Ground
Material:	Fibreglass
Finish:	All Black
Treatment:	Anodization
Diffuser type:	PMMA
Lamp type:	LED
Energy performance class:	G
Colour temperature:	2700K
CRI:	>80
Photobiological risk:	RG0
Power consumption (Watt):	2
Lumen:	140
Real Lumen:	85
Power supply:	⊗ not included
LED:	24V
Insulation class:	⚡ CL.III
Power cable:	3 m PVC 2x0.25mm
Type of protection:	<b>IP 66</b>
Resistance to breakage:	<b>IK 06 1J xx3</b>
Standards and Marks of Conformity:	CE UK CA

The brass cylinder, found on models installed in higher-risk locations such as marine areas or swimming pools, is naturally subject to alteration due to atmospheric agents such as humidity and salt, and can therefore become darker over time. This alteration is part of its characteristic and distinctive appearance.



# Linfa O 120

LT14911A2

**Lombardo.**



## Installation images:



**Lombardo S.r.l.**

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E [info@lombardo.it](mailto:info@lombardo.it)


**lombardo.it**

# Linfa 0 120

## LT14911A2

**Lombardo.**

### Photometric curves:

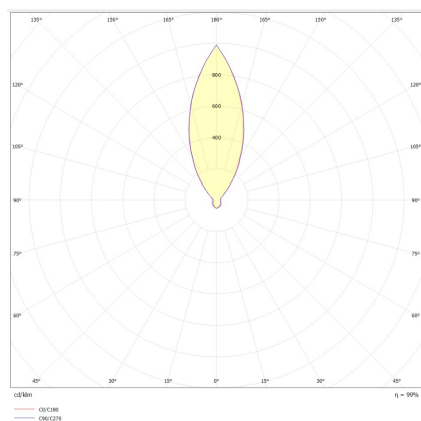

**Lombardo S.r.l.**

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E [info@lombardo.it](mailto:info@lombardo.it)

**lombardo.it**