


Noa 100 Wall

LL133032M3

Lombardo.



Technical information:

Installation:	Wall, Ceiling, Ground, Surface mounting wall
Material:	Aluminium
Finish:	Grey anthracite RAL 7021
Treatment:	Sea Treatment
Diffuser type:	Serigraphed glass
Optics:	40°
Lamp type:	LED
Energy performance class:	F
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	16
Lumen:	1750
Real Lumen:	1200
Power supply:	☑ integrated
LED:	AC DIRECT
Insulation class:	⊕ CL.I
Type of protection:	IP 66
Resistance to breakage:	IK 07 2J xx5
Standards and Marks of Conformity:	CE UK ENEC
Dimming:	Phase cut

Optic D not available for Honeycomb version.



Noa 100 Wall

LL133032M3

Lombardo.



Installation images:




Noa 100 Wall

LL133032M3

Lombardo.

Lighting simulation:

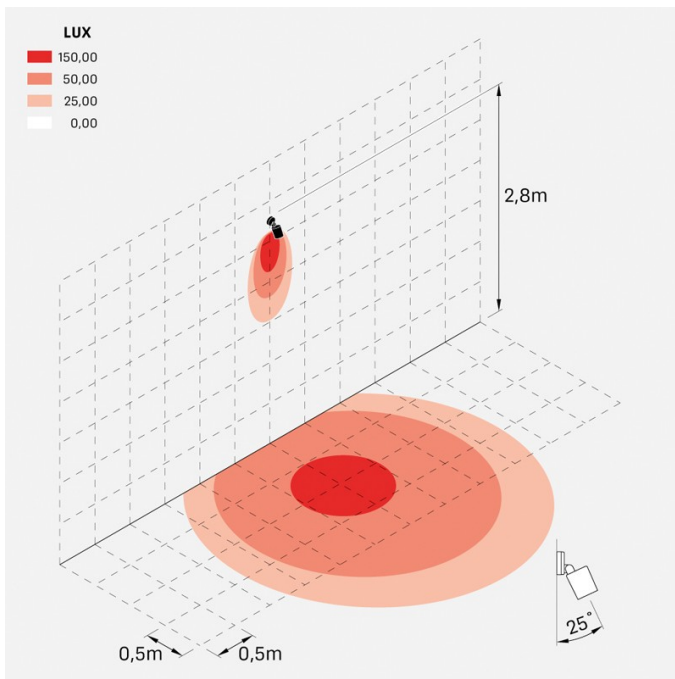

noa_100_wall_optic_m

Photometric curves:

